# scientific reports



# **OPEN** New multi-criteria decision-making technique based on neutrosophic axiomatic design

Mohamed Abdel-Basset<sup>1</sup>, Mai Mohamed<sup>1</sup>, Nehal N. Mostafa<sup>1</sup>, Ibrahim M. El-Henawy<sup>1</sup> & Mohamed Abouhawwash<sup>2⊠</sup>

There are several multicriteria decision-making (MCDM) approaches presented in the literature with their characteristics. Although traditional MCDM approaches are considered a proper implementation to select the best alternative from available types, they failed to consider uncertainty which is quite high and desires to be thoughtfully measured in the selection process. This research focuses on extending MCDM in the neutrosophic environment using axiomatic design (AD) as a novel contribution to selecting appropriate Computed Tomography (CT) devices. We present a new linguistic scale for evaluating criteria and alternatives based on single-valued triangular neutrosophic numbers (SVTrN). The proposed approach is superior to other existing approaches due to its simplicity and ability to simulate natural human thinking via considering truth, indeterminacy, and falsity degrees. Then, applying it will increase the value of imaging for medical decision-making and decrease needless costs. So, this study can be valuable to researchers by helping them consider the appropriate medical imaging system selection problem theoretically under uncertainty, and for governments and organizations to design better satisfying medical imaging evaluation systems.

Many fields are affected by DM challenges. In DM issues, it is common to study the evidence depending on many criteria instead of a single criterion. Furthermore, as the engineering environment gets more complicated, it has become more difficult for a decision-maker to assess all important parts of an issue. So, difficult decision issues are usually handled by a group of specialists by combining their expertise. Many strategies have been developed to address these difficult MCDM issues.

Axiomatic design (AD) principles are designed to provide a rigorous scientific foundation for designers, particularly in product and software design, and are frequently utilized to tackle a wide range of design challenges. It is a technique for expressing design objects as well as a set of axioms for evaluating relationships between desired functions and ways of achieving them. The use of AD principles allows for the selection of not just the best option within a set of criteria, but also the most fitting alternative. Lately, research-based on AD principles has been offered to solve MCDM challenges. The AD approach, for example, has been used to tackle problems such as cellular manufacturing systems<sup>1</sup>, robot arm selection<sup>2</sup>, and design for manufacturing context<sup>3</sup>. Also, Kulak et al.<sup>4</sup> presented a literature review about applications of AD.

Several areas of engineering cannot be assessed quantitatively but rather qualitatively when applying AD principles to MCDM issues. this can be obtained with unclear or uncertainty information, particularly in the initial stages of engineering, the data provided is sometimes restricted and imprecise. Decisions must be made in the face of uncertain, imprecise, and ambiguous data. In this situation, it is preferable for decision makers to express their opinions using linguistic variables (LV) rather than numerical ones due to their lack of information about the issue.

As a result, fuzzy sets (FS) are introduced to deal with LV assessment. The decision of membership lies at the heart of fuzzy sets. FS used to handle uncertain information which exist usually in reality, several researchers were motivated to apply it in a fuzzy environment. These applications involved design analysis<sup>5</sup>, manufacturing system assessment<sup>6</sup>, equipment choice<sup>7</sup>, valuation of transportation companies<sup>8</sup>, seat assessment regarding ease of use aspects<sup>9</sup>, suggesting competitive plans on Turkish container ports<sup>10</sup>, the model choice for ship supervision<sup>11</sup>, docking execution of shipyards<sup>12</sup>, material choice<sup>13,14</sup>, training associate choosing<sup>15</sup>, naval design<sup>16</sup>, choice of sustainable energy alternative 17,18, choosing a design concept 19, choosing green provider 20, and convenient choice

<sup>1</sup>Faculty of Computers and Informatics, Zagazig University, Shaibet an Nakareyah, Zagazig 44519, Ash Shargia Governorate, Egypt. <sup>2</sup>Department of Mathematics, Faculty of Science, Mansoura University, Mansoura 35516, Egypt. <sup>™</sup>email: abouhaww@msu.edu

for innovative engineering technology<sup>21</sup>, selection of sustainable manufacturing<sup>22</sup>, production research<sup>23</sup>, antivibration optimization<sup>24</sup>, chemistry industries<sup>25</sup>, and medical imaging systems<sup>26</sup>

However, in many cases, the given knowledge is insufficient to precisely define the degree of membership for a certain part. An amount of hesitation can be existed between membership and non-membership. As a result of the scarcity of knowledge, intuitionistic fuzzy sets (IFSs), has been introduced as generalization of FS. IFSs, which have a membership function and a non-membership function, are more suited for coping with vagueness and ambiguity. Many researches present AD using IFS<sup>27</sup>. Büyüközkan et al.<sup>28</sup> presented a methodology based on IFS and AD for supplier selection. The authors based on the AHP approach for defining weights of criteria. Also, Kuroshi and Ölçer<sup>29</sup> presented a study on choosing and evaluating ballast water management methods via integrating IFS and AD.

The NS can overcome limitations of the fuzzy set (FS) and IFS via considering truth, intermediacy, and falsity membership degrees and its ability to distinguishe between relative truth and absolute truth, as well as among relative falsity and absolute falsity<sup>30–32</sup>. So, several studies motivated to present MCDM approaches in the neutrosophic environment<sup>33–37</sup>.

While there have been several implementations of neutrosophic MCDM approaches in the medical care domain, no implementations of NAD principles for selecting suitable CT scan devices were observed in previous studies, and this motivated us to present this study.

The key challenges behind the current study are presented as follows:

- The traditional AD principles have been extended under various uncertain environments, but all existing AD approaches have limitations in managing inconsistent and indeterminate data.
- The existing techniques employed in the literature for medical imaging system selection are not suitable for handling undefined, unknown, and unreliable information.
- Several researchers applied a limited number of quantitative or qualitative criteria with their mathematical programming models for medical imaging system selection.
- Almost existing approaches which extended AD in the fuzzy and intuitionistic fuzzy environment used a limited and inflexible linguistic scale that failed to consider indeterminacy and forced decision-makers to relate linguistic variables (LV) with fixed confirmation degrees.
- There does not exist any study in literature which presented AD in neutrosophic environment for medical image selection, therefore, it is significant to introduce a new decision-making framework based on NAD.

The key contributions of this study are as follows:

- A novel extended MCDM methodology depending on NAD principles is established to select appropriate CT devices.
- A new linguistic scale for evaluating criteria and alternatives is presented.
- Our approach helps decision-makers to construct a logical and precise decision matrix based on a non-restrict confirmation degree with LV.
- A descriptive study of CT medical image device choosing is presented to clear the usefulness and realism of the introduced method.
- Evaluation with the present approach and sensitivity analysis are debated to explore the power and reliability of the gained decision outcomes.
- Applying the proposed approach will increase the value of imaging for medical decision-making and decrease needless costs.

The remaining sections are divided as follows: "Preliminaries" section presents preliminaries of NS and AD. "Proposed approach for medical image modalities selection" section, presents the steps of the proposed approach. "Case study: results and analysis" section presents the application of the proposed approach for medical image modalities selection. "Sensitivity analysis" section provides the sensitivity analysis. "Comparative analysis" section illustrates the comparative study. "Managerial implications" section provides the managerial implications of this study. "Conclusions and future directions" section illustrates the conclusion and future directions of this work.

# **Preliminaries**

In this part, some significant concepts of NS and AD principles are presented.

**Neutrosophic concepts**<sup>38</sup>. *Neutrosophic set (NS)*. Let  $\xi$  be the universe, and NS is D in  $\xi$  described by a T function  $T_D$ , I function  $I_D$  and a F function  $F_D$  where  $T_D$ ,  $I_D$  and  $F_D$  are real standard elements of [0,1]. It can be represented as: $D = \{ \langle x, (T_D(x), I_D(x), F_D(x)) \rangle : x \in E, T_D, I_D, F_D \in ]0^-, 1^+ [\}.$ 

There is no limitation on the sum of  $T_D(x)$ ,  $I_D(x)$ , and  $F_D(x)$ . So,

$$0^{-} \le T_D(x) + I_D(x) + F_D(x) \ge 1^{+}. \tag{1}$$

Score function (SF) and accuracy function (AF). Is appropriate functions for comparing SVN. Assume  $D_1 = (T_1, I_1, F_1)$  be a SVN, then, the  $SF(D_1)$ ,  $AF(D_1)$  of a SVNN are defined as follows:




Figure 1. A standard single valued triangular neutrosophic number<sup>38</sup>.

$$SF(D_1) = (2 + T_1 - I_1 - F_1)/3 \tag{2}$$

$$\stackrel{\sim}{AF(D_1)} = T_1 - F_1 \tag{3}$$

(SVTrN-number) ( $\tilde{D} = <(a_1, b_1, c_1); T_D, I_D, F_D>$ ). Is a particular NS on the real number set R, whose *T*, *I*, *F* memberships are showed in Fig. 1, and represented as follows:

$$T_D(x) = \begin{cases} (x - a_1)T_D/(b_1 - a_1), (a_1 \le x < b_1) \\ T_D, (x = b_1) \\ (c_1 - x)T_D/(c_1 - b_1), (b_1 < x \le c_1) \\ 0, otherwise \end{cases}$$
(4)

$$I_{D}(x) = \begin{cases} (b_{1} - x - I_{D}(x - a_{1}))/(b_{1} - a_{1}), (a_{1} \leq x < b_{1}) \\ I_{D}, (x = b_{1}) \\ (x - b_{1} + I_{D}(c_{1} - x))/(c_{1} - b_{1}), (b_{1} < x \leq c_{1}) \\ 1, otherwise \end{cases}$$
(5)

$$F_D(x) = \begin{cases} (b_1 - x + F_D(x - a_1))/(b_1 - a_1), (a_1 \le x < b_1) \\ F_D, x = b_1 \\ (x - c_1 + F_D(c_1 - x))/(c_1 - b_1), (b_1 < x \le c_1) \\ 1, otherwise \end{cases}$$
 (6)

*Operations of SVTrN-number.* If  $\overset{\sim}{D_1} = <(m_1,m_2,m_3); T_1,I_1,F_1>$  and  $\overset{\sim}{D_2} = <(n_1,n_2,n_3); T_2,I_2,F_2>$  is two SVTrN-number, then:

$$\stackrel{\sim}{D_1} \oplus \stackrel{\sim}{D_2} = \langle (m_1 + n_1, m_2 + n_2, m_3 + n_3); \min(T_1, T_2), \max(I_1, I_2), \max(F_1, F_2) \rangle$$
(7)

$$D_1 \otimes D_2 = \langle (m_1 n_1, m_2 n_2, m_3 n_3); \min(T_1, T_2), \max(I_1, I_2), \max(F_1, F_2) \rangle$$
(8)

$$\lambda \stackrel{\sim}{D_1} = \langle (\lambda m_1, \lambda m_2, \lambda m_3); \min(T_1, T_2), \max(I_1, I_2), \max(F_1, F_2) \rangle$$
 (9)


SC and AF of SVTrN-number. The SF  $s(D_1)$  and AF  $a(D_1)$  can be defined as follows:

$$\widetilde{SF(D_1)} = \left(\frac{1}{12}\right) [(m_1 + 2m_2 + m_3] \times [2 + T_1 - I_1 - F_1]$$
(10)

$$AF(D_1) = \left(\frac{1}{12}\right) [(m_1 + 2m_2 + m_3] \times [2 + T_1 - I_1 + F_1]$$
(11)

Ranking of SVTrN-number.

If 
$$SF(D_1) < SF(D_2)$$
, then  $D_1 < D_2$  (12)



**Figure 2.** The common area of SR and  $DR^{26}$ .

If 
$$SF(\widetilde{D_1}) = SF(\widetilde{D_2})$$
, and if (13)
$$AF(\widetilde{D_1}) < AF(\widetilde{D_2}), \text{ then } \widetilde{D_1} < \widetilde{D_2}$$

$$AF(\widetilde{D_1}) > AF(\widetilde{D_2}), \text{ then } \widetilde{D_1} > \widetilde{D_2}$$

$$AF(\widetilde{D_1}) = AF(\widetilde{D_2}), \text{ then } \widetilde{D_1} = \widetilde{D_2}$$

**Axiomatic design principles.** Independence axiom and information axiom are the most significant concepts of AD principles. The independence of functional requirements (FRs) that must be implemented is stated by the independence axiom. FRs indicate the smallest set of independent requirements which exemplifies the design goals. Where one of the most significant advantages of these methods is that if an alternative does not fulfil the FRs, the model stops it from being chosen as the best option. The information axiom declares that the design which has the minimum information content (IC) is the finest design between the designs that meet the independence axiom<sup>39</sup>.

The information axiom is represented by the IC which is correlated to the probability of sustaining the plan goals. The  $IC_i$  is given by:

$$IC_i = \log_2\left(\frac{1}{\text{Probability}_i}\right),$$
 (14)

since Probability, is the probability of reaching a certain function requirement. The logarithmic function is selected so that the IC will be additive when there are several FRs that must be fulfilled simultaneously. Where there are n FRs, the total IC is the total of all these probabilities<sup>39</sup>.

The probability of accomplishment is specified by the designer needs to attain regard to design range (DR) and the needs capability of the system regard to system range (SR). The intersection area of the DR and the SR is the common area where the satisfactory solution exists, as appears in Fig. 2.

In the case of the uniform probability distribution function Probability, can be presented as follows:

Probability<sub>i</sub> = (Common range/System range), 
$$(15)$$

$$IC_i = \log_2(System\ range/Common\ range).$$
 (16)


#### Proposed approach for medical image modalities selection

In the current section, the important concepts of AD in a neutrosophic environment are introduced. Also, a new MCDM approach for selecting appropriate medical image modalities is presented.

The extend of AD principles in neutrosophic environment. The values of criteria are presented using LV under the neutrosophic domain. Since we have imperfect information about SR and DR, then SR and DR for a specific criterion will be stated by utilizing "truth-membership (TM)," "falsity-membership (FM)" and "indeterminacy-membership (IM)." Therefore, the intersection areas of TM, IM, and FM functions of neutrosophic numbers can be attained as demonstrated in Fig. 3.

The TM, IM, and FM of information content are represented as  $(IC^T)$ ,  $(IC^I)$ , and  $(IC^F)$  respectively which can be expressed as follows:

$$IC^{T} = \log_{2} \frac{\text{Truth-membership system desgin}}{\text{Truth-membership Common area}}$$
(17)



**Figure 3.** The intersection region between SR and DR of neutrosophic numbers.

Terms	L, M, U	Confirmation degree (T, I, F)		
Absolutely low (AL)	< (0,0,1) >	Absolutely not sure (ANS)< (0, 1, 1) >		
Very low (VL)	< (0,1,2) >	Not sure (NS)< (0.2, 0.8, 0.8) >		
Low (L)	< (1, 2, 3) >	Slightly sure (SLS)< (0.3, 0.7, 0.7) >		
Medium (M)	< (2, 3, 4) >	Median sure (MS)< (0.5, 0.5, 0.5) >		
High (H)	< (3,4,5) >	Sure(S)< (0.7, 0.4, 0.4) >		
Very high (VH)	< (4, 5, 6) >	Strongly sure (STS)< (0.8, 0.2, 0.2) >		
Strongly very high (SVH)	< (5, 6, 7) >	Very strongly sure (VSS)< (0.9, 0.1, 0.1) >		
Absolutely high (AH)	< (7, 8, 9) >	Absolutely sure (AS)< (1,0,0) >		

**Table 1.** Linguistic variables of criteria and alternatives in the form of SVTrN-number.

 $IC^{I} = \log_2 \frac{\text{Indeterminacy-membership system desgin}}{\text{Indeterminacy-membership Common area}}$ (18)

$$IC^F = \log_2 \frac{\text{Falsity-membership system desgin}}{\text{Falsity-membership Common area}}$$
 (19)

In NS-domain, the SF and the AF are used to compare neutrosophic values that can be expressed as s and a respectively. In this approach, we expand s and a with the IC in the AD environment. We represent  $SF_i$  and  $AF_i$ based on IC as represented in Eqs. (2) and (3).

The approach for MCDM problems based on AD principles and neutrosophic environment. If  $AT = \{AT_1, AT_2, \dots, AT_m\}$  is a group of alternatives,  $C = \{C_1, C_2, \dots, C_n\}$  is a group of criteria,  $we = \{We_1, We_2, \dots, We_n\}$  is the weight for each C, where  $We_j \ge 0$ ,  $j = 1, 2, \dots, n$ ,  $\sum_{j=1}^n We_j = 1$ ,  $DM = \{DM_1, DM_2, \dots, DM_t\}$  is a group of DM, with an important degree of  $D_i$  is  $\eta_i \in [0, 1]$  and  $\sum_{\nu=1}^t \eta_{\nu} = 1$ and  $FR = \{\widehat{f}_{r1}, \widehat{f}_{r2}, \dots, \widehat{f}_{rn}\}$  is a group of FRs, that is the group of objectives for the criteria,  $\widehat{g}_j = (\langle \widehat{g}_{j1}, \widehat{g}_{j2}, \widehat{g}_{j3} \rangle a_j, \theta_j, \beta_j) \in FR$  based on SVTrN-number. If  $\widehat{P}_k$  is a set of DM matrices where  $\widehat{P_{ij}^{(k)}} = (\langle p_{ij1}^{(k)}, p_{ij2}^{(k)}, p_{ij3}^{(k)} \rangle a_{ij}^{(k)}, \theta_{ij}^{(k)}, \beta_{ij}^{(k)}) \in \widehat{P_k} \text{ is a preference value that is represented as SVTrN-number by the decision-maker, } DM_K \in DM \text{ for } AT_i \in AT \text{ regarding to } C_j \in C.$ 

The proposed methodology of MCDM problems based on NAD for medical image modality selection are as follows:

- Step 1. SVTrN Represent data using which < (Lower value(L), Medium(M), Upper value(U)); confirmation degree(CD) >. Use Table 1 for representation process of data.
- Aggregate decision-makers opinions using the average method via using Eq. (7) to get the summation Step 2. of SVTrN-numbers and then divide it on their numbers for each criterion.
- Compute the  $IC^T$  for each  $FR_i$ . Step 3.

$$IC_{ij}^{T} = \begin{cases} 0 & \text{if } \widehat{p}_{ij1} > \widehat{g}_{j3} \text{ or } \widehat{p}_{ij3} > \widehat{g}_{j1} \\ \log_2 \frac{Truth-membership \text{ system design}}{Truth-membership \text{ common area}} & \text{if } \widehat{p}_{ij1} \leq \widehat{g}_{j3} \text{ or } \widehat{p}_{ij3} \leq \widehat{g}_{j1} \end{cases}$$
(20)

where  $\hat{p}_{ij1}$  and  $\hat{p}_{ij3}$  are the L and U values of  $AT_i$  by  $C_i$ , where  $\hat{g}_{j1}$  and  $\hat{g}_{j3}$  are L and U values of  $FR_i$ . Step 4. Compute the  $IC^I$  for each  $FR_i$ .

$$IC_{ij}^{I} = \begin{cases} 0 & \text{if } \widehat{p}_{ij1} > \widehat{g}_{j3} \text{ or } \widehat{p}_{ij3} > \widehat{g}_{j1} \\ \log_{2} \frac{\text{Indeterminacy-membership system design}}{\text{Indeterminacy-membership common area}} & \text{if } \widehat{p}_{ij1} \leq \widehat{g}_{j3} \text{ or } \widehat{p}_{ij3} \leq \widehat{g}_{j1} \end{cases}$$
(21)

where  $\hat{p}_{ii1}$  and  $\hat{p}_{ii3}$  are the L and U values of  $AT_i$  by  $C_i$ , where  $\hat{g}_{i1}$  and  $\hat{g}_{i3}$  are L and U values of  $FR_i$ . Compute the  $IC^F$  for each  $FR_i$ .

$$IC_{ij}^{F} = \begin{cases} 0 & \text{if } \widehat{p}_{ij1} > \widehat{g}_{j3} \text{ or } \widehat{p}_{ij3} > \widehat{g}_{j1} \\ \log_{2} \frac{\text{False-membership system design}}{\text{False-membership common area}} & \text{if } \widehat{p}_{ij1} \leq \widehat{g}_{j3} \text{ or } \widehat{p}_{ij3} \leq \widehat{g}_{j1} \end{cases}$$

$$(22)$$

where  $\hat{p}_{ij1}$  and  $\hat{p}_{ij3}$  are the L and U values of  $AT_i$  by  $C_i$ , where  $\hat{g}_{i1}$  and  $\hat{g}_{i3}$  are L and U values of  $FR_i$ . Compute the value of SF for IC of  $AT_i$ 

After computing the  $IC_{ii}^T$ ,  $IC_{ii}^I$ , and  $IC_{ii}^F$  we get the form of SVN. So SF is computed based on Eq. (2).

$$SF_i = \sum_{j=1}^n SF_{ij} \cdot W_j = \sum_{j=1}^n [2 + T_{ij} - I_{ij} - F_{ij}]/3 \cdot W_j$$
 (23)

Step 7. Compute the value of AF for IC of  $AT_i$ .

After computing the  $IC_{ii}^T$ ,  $IC_{ii}^I$ , and  $IC_{ii}^F$  we get the form of SVN. So AF is computed based on Eq. (3).

$$AF_{i} = \sum_{j=1}^{n} AF_{ij} \cdot W_{j} = \sum_{j=1}^{n} [T_{ij} - F_{ij}] \cdot W_{j}$$
(24)

Rank alternatives. Step 8.

> Based on ranking of SVTrN-number using Eqs. (12) and (13), choose the best alternative, according to  $SF_i$ . In the condition that  $SF_i$  of alternatives are equal, then rank them based on  $AT_i$ . This part presented as follows:

If 
$$SF_i < SF_j$$
, then  $AT_i < AT_j$  (i.e.  $AT_i$  is worse than  $AT_j$ ) (25)

If 
$$SF_i = SF_j$$
 and if, (26)

 $AF_i < AF_i$ , then  $AT_i < AT_i$  (i.e.  $AT_i$  is worse than  $AT_i$ )

 $AF_i > AF_i$ , then  $AT_i > AT_i$  (i.e.  $AT_i$  is better than  $AT_i$ )

$$AF_i = AF_i$$
, then  $AT_i = AT_i$  (i.e.  $AT_i$  is equal to  $AT_i$ )

The flowchart of proposed approach presented in Fig. 4.


# Case study: results and analysis

In our study, we aim to introduce a novel methodology for selecting the suitable medical image modality for a hospital involve 3000 employees. The selection process is based on five available devices of CT medical image modalities. The decision-makers in our case study are as follows:

- D1: The main physician,
- D2: A purchasing sector director, and
- D3: A radiologist.

The decision-makers detected four criteria to select the available device as follows:

C1: Number of image slices, C2: Price, C3: Highest patient weight (kg), and C4: Excellence of After-sales service. Also, the FRs that must be assured by the CT device are presented in Table 2.

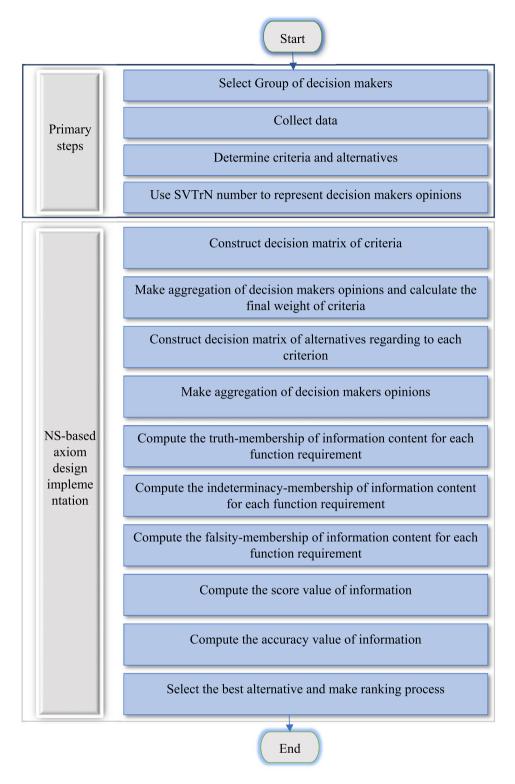

**Figure 4.** Flowchart of proposed approach.

For solving this MCDM problem using the suggested approach apply the following steps:

- Step 1. Use LV presented in Table 1 to represent data. After then, construct decision matrices according to decision makers' selections for determining the significance rate of criteria as in Table 3.
- Step 2. Use the average method for aggregating weights of decision makers and make normalization after that as in Table 4. Finally, use the SF equation to compute weights values.
- Construct decision matrices for evaluating alternatives considering every criterion as in Table 5. Step 3.

Criteria	Functional requirements	Neutrosophic value
C1	VH; STS	< (4, 5, 6); (0.8, 0.2, 0.2) >
C2	M; STS	< (2, 3, 4); (0.8, 0.2, 0.2) >
C3	SVH; VSS	< (5, 6, 7); (0.9, 0.1, 0.1) >
C4	AH; VSS	< (7,8,9); (0.9,0.1,0.1) >

Table 2. FRs for CT modality.

	C1	C2	C3	C4			
D1	D1 AH; AS L; NS		AL; NS M; AN				
D2	H; MS	M; NS H; MS		H; VSS			
D3	M; STS	VL; S	/L; S M; SLS				
The co	The corresponding SVTrN values						
	C1 C2		C3	C4			
D1	(7, 8, 9); (1, 0, 0)	(1, 2, 3); (0.2, 0.8, 0.8)	(0, 0, 1); (0.2, 0.8, 0.8)	(2, 3, 4); (0, 1, 1)			
D2	(3, 4, 5); (0.5, 0.5, 0.5) (2, 3, 4); (0.2, 0.8, 0.8		(3, 4, 5); (0.5, 0.5, 0.5)	(3, 4, 5); (0.9, 0.1, 0.1)			
D3	(2, 3, 4); (0.8, 0.2, 0.2)	(0, 1, 2); (0.7, 0.4, 0.4)	(2, 3, 4); (0.3, 0.7, 0.7)	(1, 2, 3); (0.5, 0.5, 0.5)			

Table 3. The neutrosophic values for evaluating criteria regarding decision-makers.

	C1	C2	C3	C4
Aggregated weights	(4, 5, 6); (0.5, 0.5, 0.5)	(1, 2, 3); (0.2, 0.8, 0.8)	(1.67, 2.3, 3.3); (0.2, 0.8, 0.8)	(2, 3, 4); (0, 0.5, 0.5)
Normalized weights	(1, 1, 1); (0.5, 0.5, 0.5)	(0.25, 0.4, 0.5); (0.2, 0.8, 0.8)	(0.4175, 0.46, 0.55); (0.2, 0.8, 0.8)	(0.5, 0.6, 0.67); (0, 0.5, 0.5)
SF for weights	0.5	0.0775	0.094375	0.1975

**Table 4.** The aggregated and normalized values of weights.

D1						
	C1	C2	C3	C4		
A1	H; S	M; MS	AH; VSS	AH; STS		
A2	SVH; STS	M; S	SVH; VSS	AH; STS		
A3	M; MS	L; SLS	AH; VSS	AH; VSS		
A4	AH; VSS	L; MS	M; MS	AH; VSS		
A5	AH; VSS	VL; VSS	H; S	AH; VSS		
D2						
	C1	C2	C3	C4		
A1	VH; S	M; MS	VH; STS	SVH; VSS		
A2	VH; STS L; SLS	L; SLS	VH; VSS	SVH; VSS		
A3	M; MS	IS VL; SLS H; S	H; S	SVH; STS		
A4	AH; VSS	L; SLS	VH; STS	VH; STS		
A5	H; S	VL; NS	H; S	AH; VSS		
D3						
	C1	C2	C3	C4		
A1	VH; VSS	M; MS	H; S	AH; VSS		
A2	H; S	VL; NS	H; S	SVH; STS		
A3	VH; VSS	L; SLS	H; MS	VH; STS		
A4	H; STS	VL; SLS	AH; STS	SVH; STS		
A5	H; S	H; MS	SVH; STS	AH; VSS		

**Table 5.** Evaluating alternatives considering every criterion.

	C1	C2	C3	C4
A1	< (3.67, 4.67, 5.67); (0.7, 0.4, 0.4) >	< (2,3,4); (0.5,0.5,0.5) >	<(4.67, 5.67, 6.67); (0.7, 0.4, 0.4)>	< (6.33, 7.33, 8.33); (0.8, 0.2, 0.2) >
A2	A2 $< (4,5,6); (0.7,0.4,0.4) >$ $< (1,2,3); (0.2,0.8,0.8) >$		< (4,5,6); (0.7,0.4,0.4) >	< (5.67, 6.67, 7.67); (0.8, 0.2, 0.2) >
A3	< (2.67, 3.67, 4.67); (0.5, 0.5, 0.5) >	< (0.67, 1.67, 2.67); (0.3, 0.7, 0.7) >	< (4.33, 5.33, 6.33); (0.5, 0.5, 0.5) >	< (5.33, 6.33, 7.33); (0.8, 0.2, 0.2) >
A4	< (5.67, 6.67, 7.67); (0.80, 0.20, 0.20) >	< (0.67, 1.67, 2.67); (0.3, 0.7, 0.7) >	< (4.33, 5.33, 6.33); (0.5, 0.5, 0.5) >	< (5.33, 6.33, 7.33); (0.8, 0.2, 0.2) >
A5	< (4.33, 5.33, 6.33); (0.7, 0.4, 0.4) >	< (1,2,3); (0.2,0.8,0.8) >	< (3.67, 4.67, 5.67); (0.7, 0.4, 0.4) >	< (7,8,9); (0.9,0.1,0.1) >

**Table 6.** The aggregated values of alternatives.

	C1	C2	C3	C4
A1	0.497	0	0.497	1.162
A2	0	1.23	1.807	3.415
A3	3.05	2.836	0.873	5.473
A4	4.64	2.836	0.873	5.473
A5	0.341	1.23	3.22	0

**Table 7.** The Truth-membership IC.

	C1	C2	C3	C4
A1	1.3	1.32	2.32	1.7
A2	1	3.32	3.152	4.058
A3	4.21	4.544	2.943	6.058
A4	4.32	4.544	2.943	6.058
A5	1.234	3.32	1.736	0

**Table 8.** The Indeterminacy-membership IC.

	C1	C2	C3	C4
A1	1.3	1.32	2.32	1.7
A2	1	3.32	3.152	4.058
A3	4.21	4.544	2.943	6.058
A4	4.32	4.544	2.943	6.058
A5	1.234	3.32	1.736	0

**Table 9.** The False-membership IC.


A1	A2	A3	A4	A5	
-0.13	-0.433366875	-1.224790208	-0.9964569	0.143230833	

Table 10. SF results.

- Make aggregation of decision makers' opinions about evaluating alternatives considering every cri-Step 4. terion as in Table 6.
- Compute the  $IC^T$  using Eq. (20) as presented in Table 7. Step 5.
- Compute the  $IC^I$  using Eq. (21) as presented in Table 8. Step 6.
- Compute the  $IC^F$  using Eq. (22) as presented in Table 9. Step 7.
- Step 8. Compute the SF of IC using Eq. (23) as appears in Table 10.
- Step 9. Compute the AF of IC using Eq. (24) as appears in Table 11.
- Step 10. Ranking alternatives

A1	A2	A3	A4	A5	
-0.85	-0.979398125	-1.0810325	-0.3410325	-0.4684225	

Table 11. AF results.

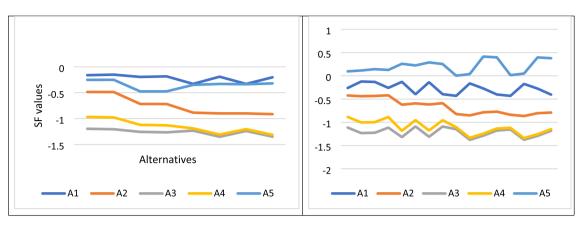

Case #	C1	C2	C3	C4	C1	C2	С3	C4
1	1	2	3	4	1	3	2	4
2	1	2	4	3	1	3	4	2
3	2	1	3	4	1	4	3	2
4	2	1	4	3	1	4	2	3
5	3	1	2	4	2	3	4	1
6	3	1	4	2	2	3	1	4
7	4	1	2	3	2	4	3	1
8	4	1	3	2	2	4	1	3
(A)						(B)		

Figure 5. Various priorities of criteria and its impact on alternatives rank from case 1 to 8.

Based on Eqs. (25) and (26) for ranking NS numbers. The final rank is as follows: A5 > A1 > A2 > A4 > A3.

# Sensitivity analysis

The sensitivity analysis of the suggested approach is conducted to assess the persistence of the priority rating and it can be an efficient way to determine the proposed approach's efficiency. A sensitivity analysis was performed on the attribute rank. So, we will show how various priorities of criteria will impact on final rank of alternatives.

As we have 5 attributes, we get 24 case, so only 8 random cases has been shown in Fig. 5. Figure 5 show the change in the final rank of alternatives regarding to various priorities of criteria. As shown in the figure, changing the order of the attributes has a significant affect on the weights of the alternatives.

The result of our sensitivity analysis shows that alternative1 and 5 are the best two alternatives for CT device selection. Alternative 1 shows superior results in Fig. 5A, while alternative 5 shows superior ranking results in Fig. 5B. Alternatives 4 and 3 are the lowest rank of alternatives in all cases. While alternative 2 shows a medium rank in all results which indicates the stability during changes of weights.

The findings of the sensitivity analysis indicate that in cases 1, 2, 7,8,13,14, 19 and 20, A1 is the best alternative, and A3 is the worst one. In cases 3, 4, 5, 6, 9, 10, 11, 12, 15, 16, 17, 18, 21, 22, 23, and 24, A5 is the best CT device and A3 is the worst. In conclusion, A1 showed eight times as the best alternative. Also, A1 showed sixteen times as the best alternative. But, A3 is the lowest rank in all cases.

### Comparative analysis

In this part, we provide a comparison between the suggested approach and the other approach which presented AD in the intuitionistic fuzzy environment<sup>27</sup>.

By applying the proposed approach in<sup>27</sup> on our CT device selection problem, the final rank of alternatives are as follows: A1 > A2 > A5 > A4 > A3. This rank is determine based on SF and AF values as in Eqs. (25) and

	Proposed approach	Presented in <sup>27</sup>
A1	2	1
A2	3	2
A3	5	5
A4	4	4
A5	1	3

Table 12. Ranking of alternatives using two approaches.

(26). Where the highest SF value in our proposed is A5 and the highest SF value in 27 is A1. Table 12 summarizes the final rank of our CT selection problem using the approach presented in<sup>27</sup> and our suggested approach.

For comparing ranks of the proposed approach with other approaches presented in<sup>27</sup> we used the following statistical methods as follows:

**Spearman's correlation.** Calculates the linear correlation between two continuous variables. A correlation is linear when a change in one variable is correlated with a relative change in the other variable, that presented as follows:

$$SP = 1 - \left[ \frac{6 \cdot \sum_{n=1}^{ALT} (Distance_n)^2}{ALT \cdot (ALT^2 - 1)} \right]$$
 (27)

where ALT is the number of alternatives, and  $Distance_n$  is the subtraction between alternatives ranking. The values of +1 or -1 indicate a strong correlation between two observations, and the 0 value indicates a low correlation.

**Person's correlation.** Calculate the strength of linear correlation. The values of +1 or -1 indicate a completely positive or negative linear correlation. and 0 value indicates unavailable linear correlation. Which represented as follows:

$$PR(x,y) = \frac{cov(x,y)}{\sigma_x \sigma_y}$$
 (28)

where, cov(x, y) is the covariance between x, y, and  $\sigma_x, \sigma_y$  is the standard deviation of x and y respectively. By calculating the Spearman correlation using Eq. (27) the correlation value is 0.7. Also, the Person correlation is 0.7, which indicates a strong correlation between the two approaches.

From a comparative study between our proposed approach and other presented approach in<sup>27</sup>, we concluded that our approach is simple to implement and more logical than the presented approach in<sup>27</sup> for the following reasons:

- Since NS is more effective than IFS for dealing with uncertainty, then extending AD in a neutrosophic environment is more precise than AD which is presented in an intuitionistic fuzzy environment.
- The extended AD in a neutrosophic environment simulates natural human thinking since indeterminacy degree does not depend on truth and falsity degree. Then, it can deal with situations in which fuzzy and intuitionistic fuzzy AD fails to handle.
- Our proposed scale can deal with bigger areas in common ranges than presented in<sup>27</sup>.
- Finally, the scale presented in<sup>27</sup>, can't provide a logical confirmation degree since it is restricted to the linguistic variable. But our scale makes decision-makers feel free to use the suitable linguistic variable and its confirmation degree which can vary from one decision-maker to another.

# Managerial implications

All existing hospitals need to select appropriate types of medical imaging systems which able to notice diseases at their beginning phase and then refining the patient's prediction intensely. As the selection process is a hard and complex task due to conflicting criteria and numerous available alternatives which exist nowadays, then we need a new extended MCDM approach. In this study, we presented for the first time a new extended MCDM approach based on NAD for handling uncertainty which exist usually in the selection process. The proposed approach proved its ability to deal with uncertainty and then make precise decisions. The proposed model can be a powerful guide for hospitals or medical organizations that desire to select appropriate medical imaging systems. Also, governments can use the suggested approach for making precise decisions about any social, economic, and environmental problems.

#### Conclusions and future directions

Lately, AD methods to decision making have grown in popularity. One of the most significant advantages of these methods is that if an alternative does not fulfil the FRs, the model stops it from being chosen as the best option. NAD techniques may handle both neutrosophic and crisp values simultaneously by extending the AD methodology to neutrosophic settings. This feature is not present in any other MCDM techniques described in the literature. In our study, we presented for the first time the principles of AD in a neutrosophic environment. We also suggested a new MCDM approach depending on neutrosophic axiomatic design for medical imaging systems. A real case study for selecting the best CT device is provided. To our knowledge, this study is the first in which AD technique are integrated with SVTrN.

We also compared the proposed approach with another approach that applied AD in an intuitionistic fuzzy environment. From the comparison, we concluded that our approach is superior to other approaches due to its simplicity and ability to represent natural human thinking via considering vague, and uncertain information.

In the future, we plan to use various multicriteria decision-making approaches based on neutrosophic axiomatic design to solve various problems in the engineering and agriculture domains. We also plan to implement AD to various types of NS for image modality selection.

# Data availability

All data generated or analyzed during this study are included in this article.

Received: 7 February 2022; Accepted: 8 June 2022 Published online: 23 June 2022

#### References

- 1. Kulak, O., Durmusoglu, M. B. & Tufekci, S. A complete cellular manufacturing system design methodology based on axiomatic design principles. Comput. Ind. Eng. 48, 765-787 (2005).
- 2. Bahadir, M. C. & Satoglu, S. I. A novel robot arm selection methodology based on axiomatic design principles. Int. J. Adv. Manuf. Technol. 71, 2043-2057 (2014).
- Gonçalves-Coelho, A. M. & Mourao, A. J. Axiomatic design as support for decision-making in a design for manufacturing context: A case study. Int. J. Prod. Econ. 109, 81-89 (2007).
- 4. Kulak, O., Cebi, S. & Kahraman, C. Applications of axiomatic design principles: A literature review. Expert Syst. Appl. 37, 6705-6717
- 5. Huang, G. Q. & Jiang, Z. Web-based design review of fuel pumps using fuzzy set theory. Eng. Appl. Artif. Intell. 15, 529-539 (2002).
- 6. Kulak, O. & Kahraman, C. Multi-attribute comparison of advanced manufacturing systems using fuzzy vs. crisp axiomatic design approach, Int. I. Prod. Econ. 95, 415-424 (2005).
- 7. Kulak, O. A decision support system for fuzzy multi-attribute selection of material handling equipments. Expert Syst. Appl. 29, 310-319 (2005).
- 8. Kulak, O. & Kahraman, C. Fuzzy multi-attribute selection among transportation companies using axiomatic design and analytic hierarchy process. Inf. Sci. 170, 191-210 (2005).
- 9. Eraslan, E., Akay, D. & Kurt, M. Usability ranking of intercity bus passenger seats using fuzzy axiomatic design theory. In International Conference on Cooperative Design, Visualization and Engineering 141-148 (2006).
- 10. Celik, M., Cebi, S., Kahraman, C. & Er, I. D. Application of axiomatic design and TOPSIS methodologies under fuzzy environment for proposing competitive strategies on Turkish container ports in maritime transportation network. Expert Syst. Appl. 36, 4541-4557 (2009).
- 11. Celik, M. & Er, I. D. Fuzzy axiomatic design extension for managing model selection paradigm in decision science. Expert Syst. Appl. 36, 6477-6484 (2009).
- 12. Celik, M., Kahraman, C., Cebi, S. & Er, I. D. Fuzzy axiomatic design-based performance evaluation model for docking facilities in shipbuilding industry: The case of Turkish shipyards. Expert Syst. Appl. 36, 599-615 (2009).
- 13. Cicek, K. & Celik, M. Selection of porous materials in marine system design: The case of heat exchanger aboard ships. Mater. Des. 30, 4260-4266 (2009).
- 14. Cicek, K. & Celik, M. Multiple attribute decision-making solution to material selection problem based on modified fuzzy axiomatic design-model selection interface algorithm. Mater. Des. 31, 2129-2133 (2010).
- 15. Dujmovic, J. J., De Tré, G. & Dragicevic, S. Comparison of multicriteria methods for land-use suitability assessment. In IFSA/ EUSFLAT Conf., 1404-1409 (2009).
- 16. Cebi, S., Celik, M. & Kahraman, C. Structuring ship design project approval mechanism towards installation of operator-system interfaces via fuzzy axiomatic design principles. Inf. Sci. 180, 886-895 (2010).
- 17. Kahraman, C., Kaya, İ & Cebi, S. A comparative analysis for multiattribute selection among renewable energy alternatives using fuzzy axiomatic design and fuzzy analytic hierarchy process. Energy 34, 1603-1616 (2009).
- 18. Kahraman, C., Cebi, S. & Kaya, I. Selection among renewable energy alternatives using fuzzy axiomatic design: The case of Turkey. J. Univ. Comput. Sci. 16, 82-102 (2010).
- 19. Akay, D., Kulak, O. & Henson, B. Conceptual design evaluation using interval type-2 fuzzy information axiom. Comput. Ind. 62, 138-146 (2011).
- 20. Büyüközkan, G. An integrated fuzzy multi-criteria group decision-making approach for green supplier evaluation. Int. J. Prod. Res. 50, 2892-2909 (2012).
- 21. Maldonado, A., García, J. L., Alvarado, A. & Balderrama, C. O. A hierarchical fuzzy axiomatic design methodology for ergonomic compatibility evaluation of advanced manufacturing technology. Int. J. Adv. Manuf. Technol. 66, 171-186 (2013).
- 22. Beng, L. G. & Omar, B. Hybrid model for evaluation of manufacturing sustainability using axiomatic design principles: a case of machining processes. In Applied Mechanics and Materials, 546-550 (2014).
- 23. Cebi, S. & Kahraman, C. A new weighted fuzzy information axiom method in production research. J. Enterprise Inf. Manag. (2019).
- 24. Cheng, J., Feng, Y., Lin, Z., Liu, Z. & Tan, J. Anti-vibration optimization of the key components in a turbo-generator based on heterogeneous axiomatic design. J. Clean. Prod. 141, 1467-1477 (2017).
- Wu, Y., Zhou, F. & Kong, J. Innovative design approach for product design based on TRIZ, AD, fuzzy and Grey relational analysis. Comput. Ind. Eng. 140, 106276 (2020).
- 26. Kulak, O., Goren, H. G. & Supciller, A. A. A new multi criteria decision making approach for medical imaging systems considering risk factors. Appl. Soft Comput. 35, 931-941 (2015).
- 27. Li, M. Extension of axiomatic design principles for multicriteria decision making problems in intuitionistic fuzzy environment. Math. Probl. Eng. 2013 (2013).
- 28. Büyüközkan, G. & Göçer, F. Application of a new combined intuitionistic fuzzy MCDM approach based on axiomatic design methodology for the supplier selection problem. Appl. Soft Comput. 52, 1222-1238 (2017).
- Kuroshi, L. & Ölçer, A. Technique selection and evaluation of ballast water management methods under an intuitionistic fuzzy environment: An information axiom approach. Proc. Inst. Mech. Eng. Part M J. Eng. Maritime Environ. 231, 782-800 (2017).
- 30. Smarandache, F. & Neutrosophy, N. P. Set, and Logic, ProQuest Information & Learning, 105 (1998).

- 31. Zhang, L. & Zhang, Y. A novel region merge algorithm based on neutrosophic logic. Int. J. Digit. Content Technol. Appl. 5, 381-387
- Nguyen, G. N., Ashour, A. S. & Dey, N. A survey of the state-of-the-arts on neutrosophic sets in biomedical diagnoses. Int. J. Mach. Learn, Cybern, 10, 1-13 (2019).
- 33. Hezam, İ. M., Nayeem, M. K., Foul, A. & Alrasheedi, A. F. COVID-19 Vaccine: A neutrosophic MCDM approach for determining the priority groups. Results Phys. 20, 103654 (2021).
- 34. Abdel-Basset, M., Mohamed, M., Hussien, A.-N. & Sangaiah, A. K. A novel group decision-making model based on triangular neutrosophic numbers, Soft, Comput. 22, 6629-6643 (2018)
- 35. Abdel-Basset, M., Mohamed, M. & Smarandache, F. An extension of neutrosophic AHP-SWOT analysis for strategic planning and decision-making. Symmetry 10, 116 (2018).
- 36. Abdel-Baset, M., Chang, V. & Gamal, A. Evaluation of the green supply chain management practices: A novel neutrosophic approach. Comput. Ind. 108, 210-220 (2019).
- 37. Abdel-Basset, M., Mohamed, M., Elhoseny, M., Chiclana, F. & Zaied, A.E.-N.H. Cosine similarity measures of bipolar neutrosophic set for diagnosis of bipolar disorder diseases. Artif. Intell. Med. 101, 101735 (2019).
- 38. Smarandache, F. & Pramanik S. New Trends in Neutrosophic Theory and Applications, Volume II: Infinite Study (2018).
- 39. Suh, N. P. Axiomatic design theory for systems. Res. Eng. Des. 10, 189-209 (1998).

#### **Author contributions**

Conceptualization, M.A-B., M.M., N.N.M. and M.A.; methodology, M.A-B., M.M., M.A.; software, M.A-B., M.M., M. A., N.N.M.; validation, M.A., I.M.E-H.; formal analysis, M.A-B., M.M. and M.A.; investigation, N.N.M., I.M.E-H. and M.A.; resources, M.A-B. and M.M.; data curation, M.A-B., M.M., N.N.M. and M.A.; writingoriginal draft preparation, M.A-B., M.M. and M.A.; writing—review and editing, N.N.M., I.M.E-H. and M.A.; visualization, M.A-B., M.A., I.M.E-H. and M.M.; supervision, M.A-B., M.M. and M.A.; project administration, M.A-B., M.M., and M.A.. All authors have read and agreed to the published version of the manuscript.

# **Funding**

Open access funding provided by The Science, Technology & Innovation Funding Authority (STDF) in cooperation with The Egyptian Knowledge Bank (EKB).

# Competing interests

The authors declare no competing interests.

### Additional information

**Correspondence** and requests for materials should be addressed to M.A.

Reprints and permissions information is available at www.nature.com/reprints.

Publisher's note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit http://creativecommons.org/licenses/by/4.0/.

© The Author(s) 2022

### Terms and Conditions

Springer Nature journal content, brought to you courtesy of Springer Nature Customer Service Center GmbH ("Springer Nature").

Springer Nature supports a reasonable amount of sharing of research papers by authors, subscribers and authorised users ("Users"), for small-scale personal, non-commercial use provided that all copyright, trade and service marks and other proprietary notices are maintained. By accessing, sharing, receiving or otherwise using the Springer Nature journal content you agree to these terms of use ("Terms"). For these purposes, Springer Nature considers academic use (by researchers and students) to be non-commercial.

These Terms are supplementary and will apply in addition to any applicable website terms and conditions, a relevant site licence or a personal subscription. These Terms will prevail over any conflict or ambiguity with regards to the relevant terms, a site licence or a personal subscription (to the extent of the conflict or ambiguity only). For Creative Commons-licensed articles, the terms of the Creative Commons license used will apply.

We collect and use personal data to provide access to the Springer Nature journal content. We may also use these personal data internally within ResearchGate and Springer Nature and as agreed share it, in an anonymised way, for purposes of tracking, analysis and reporting. We will not otherwise disclose your personal data outside the ResearchGate or the Springer Nature group of companies unless we have your permission as detailed in the Privacy Policy.

While Users may use the Springer Nature journal content for small scale, personal non-commercial use, it is important to note that Users may not:

- 1. use such content for the purpose of providing other users with access on a regular or large scale basis or as a means to circumvent access control:
- 2. use such content where to do so would be considered a criminal or statutory offence in any jurisdiction, or gives rise to civil liability, or is otherwise unlawful;
- 3. falsely or misleadingly imply or suggest endorsement, approval, sponsorship, or association unless explicitly agreed to by Springer Nature in writing:
- 4. use bots or other automated methods to access the content or redirect messages
- 5. override any security feature or exclusionary protocol; or
- 6. share the content in order to create substitute for Springer Nature products or services or a systematic database of Springer Nature journal content.

In line with the restriction against commercial use, Springer Nature does not permit the creation of a product or service that creates revenue, royalties, rent or income from our content or its inclusion as part of a paid for service or for other commercial gain. Springer Nature journal content cannot be used for inter-library loans and librarians may not upload Springer Nature journal content on a large scale into their, or any other, institutional repository.

These terms of use are reviewed regularly and may be amended at any time. Springer Nature is not obligated to publish any information or content on this website and may remove it or features or functionality at our sole discretion, at any time with or without notice. Springer Nature may revoke this licence to you at any time and remove access to any copies of the Springer Nature journal content which have been saved.

To the fullest extent permitted by law, Springer Nature makes no warranties, representations or guarantees to Users, either express or implied with respect to the Springer nature journal content and all parties disclaim and waive any implied warranties or warranties imposed by law, including merchantability or fitness for any particular purpose.

Please note that these rights do not automatically extend to content, data or other material published by Springer Nature that may be licensed from third parties.

If you would like to use or distribute our Springer Nature journal content to a wider audience or on a regular basis or in any other manner not expressly permitted by these Terms, please contact Springer Nature at

onlineservice@springernature.com