



Classification of trapezoidal bipolar neutrosophic number, de-bipolarization technique and its execution in cloud service-based MCGDM problem

Avishek Chakraborty^{1,3} · Sankar Prasad Mondal² · Shariful Alam³ · Arindam Dey⁴ 

Received: 24 February 2020 / Accepted: 17 June 2020
© The Author(s) 2020

Abstract

Neutrosophic set can deal with the uncertainties related to the information of any decision making problem in real life scenarios, where fuzzy set may fail to handle those uncertainties properly. In this study, we present the perception of trapezoidal bipolar neutrosophic numbers and its classification in different frame. We introduce the idea of disjunctive structures of trapezoidal bipolar neutrosophic numbers namely type-1 trapezoidal bipolar neutrosophic number, type-2 trapezoidal bipolar neutrosophic numbers, and type-3 trapezoidal bipolar neutrosophic number based on the perception of dependency among membership functions in neutrosophic set. In any neutrosophic decision-making problem, the decision maker uses the comparison of neutrosophic numbers to choose among alternatives solutions. Here, we introduce a ranking method, i.e., De-bipolarization scheme for trapezoidal bipolar neutrosophic number (TrBNN) using removal area technique. We also describe the utility of trapezoidal bipolar neutrosophic number and its appliance in a multi criteria group decision making problem (MCGDM) for distinct users in trapezoidal bipolar arena which is more ethical, precise and reliable in neutrosophic field.

Keywords Trapezoidal bipolar neutrosophic number · De-bipolarization · Multi criterion group decision making problem

Introduction

The theory of impreciseness was first portrayed by Professor L. A. Zadeh in 1965. Demonstration of membership function and its logical significance was described briefly in [1]. In this contemporary era, the theory of ambiguity theater a fundamental position in different domain of research field like mathematical modeling, social science, networking, decision making problem, medical diagnoses problems etc. Furthermore, researchers from disjunctive

arena invented trapezoidal [2], pentagonal [3], hexagonal [4] fuzzy numbers and their different applications in various fields. Later, in 1986, Atanassov [5] represents a legerdmain idea namely intuitionistic fuzzy set (IFS), where both membership and non-membership functions are well thought-out together in a graphical frame. After that, Liu and Yuan [6] introduced triangular IFS and Ye [7] invented trapezoidal IFS which are the congenial combination of triangular, trapezoidal FS and IFS, respectively. Later, in 1998, Smarandache [8] ignited a legerdmain conception of neutrosophic set (NS) which actually deals with three different categories of membership functions namely (i) truth, (ii) false and (iii) hesitation membership function. Invention of NS plays an important impact in science and engineering research domain. In this current epoch, it is generally used in decision making (D.M) problem and mathematical modeling. As researches goes on, researchers developed single valued NS [9], triangular NS [10], trapezoidal NS [11] and recently, Chakraborty [12] constructed the theory of pentagonal neutrosophic set. Basset et al. [13] developed the perception of type 2 neutrosophic numbers, Peng et al. [14] ignited power aggregation operator-based MCGDM, Maity et al. [15] focused on backlogging EOQ model in dense

✉ Arindam Dey
arindam84nit@gmail.com

¹ Department of Basic Science, Narula Institute of Technology, Agarpara, Kolkata 700109, India

² Department of Applied Science, Maulana Abul Kalam Azad University of Technology, West Bengal, Nadia, Haringhata, West Bengal 741249, India

³ Department of Mathematics, Indian Institute of Engineering Science and Technology, Shibpur, Howrah 711103, India

⁴ Department of Computer Science and Engineering, Saroj Mohan Institute of Technology, Hooghly, West Bengal 712512, India

environment, Garg [16] analyzed L.P.P.-based D.M problem, Wang et al. [17] established linguistic MCGDM problem in cloud model, Jiang [18] introduced learning model using defuzzification skill, Nabeeh et al. [19] formulated neutrosophic AHP model based on IoT, Biswas et al. [20] proposed TOPSIS skill MCGDM problem, Yu-Han et al. [21] proposed MCGDM problem using VIKOR method, Stanujkic et al. [22] represents MULTIMOORA technique MCDM problem, Haque et al. [23] structured generalized spherical number, Chakraborty [24] evolved neutron-logic oriented EOQ model, the authors [25, 26] developed cylindrical neutrosophic number etc.

Recently, conception of bipolarity [27, 28, 29] has been introduced in research domain to grab human mind's dilemma based on positive and negative part by Bosc and Pivert [30]. Demonstration of positive and negative membership functions has been developed in this bipolarity concept. Furthermore, Lee [31, 32] extensive the thought of bipolar fuzzy set and Kang and Kang [33] applied this conception into group theory algebra, semi group and other group-related fields. After that, Deli [25] manifested the conception of decision making problem in bipolar environment. Broumi [26] introduced bipolar graph concept and further Ali [34] developed the idea of complex neutrosophic set in uncertainty domain. Later, Molodtsov [31] manifested soft bipolar set and Aslam [32] applied it in D.M problem. After that, Uluçay [35] and Wang [36] developed similarity measure in bipolar set and operators in bipolar domain, respectively. In recent times, Chakraborty et al. [37] ignited the idea of bipolar number in triangular form and its classification in different aspects and Hashim [38] introduced hope function related to bipolar domain. Furthermore, Lee [39] developed operations on bipolar set, Jana [40] established dombi aggregation operation on bipolar arena and Broumi et al. [41] formulated bipolar neutrosophic shortest path problem. Cloud computing (CC) is a computational system model which assigned different computing assets to the users. The main goal of computation of a cloud service-based model is to construct the important scope for cloud service user by accessing the minimum infrastructure and software applications from any instance. So, CC gives a new kind of details and services that increase the new vision of IT services. The recent development of the CC and at the same time the growth of the smart mobile components help us to imagine mobile cloud computing. Recently, cloud service-based problem plays a crucial impact on uncertainty research domain. Fei Tao et al. [42] developed cloud manufacturing service problem, Shuai et al. [43] germinated cloud-based MCDM problem using trust evaluation, Rehman et al. [44] proposed cloud selection-based MCDM skill, Garg [45] established ranking of cloud services under uncertainty, Yang et al. [46] ignited service assortment skill for cross cloud services, Jaiganesh et al. [47] proposed load optimization in CC, Wei et al. [48] manifested gray analysis C.C using MADM problem, Ashtiani

et al. [49] developed TOPSIS-based C.C problem, Chen et al. [50] build up MCDM problem in CC services and VIKOR skill under impreciseness, Su et al. [51] framed VIKOR method in CC services etc. There exists [52–56] lots of work in this domain.

In this article, we demonstrate different form of trapezoidal bipolar neutrosophic number and its classification. We also manifested the conception of both linear and non-linear single valued trapezoidal bipolar neutrosophic number and its disjunctive categories according to the dependency and independency of membership functions. Additionally, a new de-bipolarized technique is developed here using the conception of removal area method of linear trapezoidal bipolar neutrosophic number. Utilizing this novel technique anyone can find out the crispified value of a trapezoidal neutrosophic number. Finally, we consider a cloud service-based MCGDM problem as an application of the work under trapezoidal bipolar neutrosophic environment in which we applied the developed results of de-bipolarization skill. Here, our main goal is to catch the best alternative cloud service provider among finite number of service providers. Lastly, a sensitivity analysis has been performed on weights of the attribute function that clearly shows us disjunctive ranking cases of the proposed problem. This novel thought will help the researchers to identify classification of trapezoidal bipolar model, de-bipolarization skill, MCGDM problem and sensitivity analysis in future research work.

Motivation

The conception of bipolar number has been widely applied in various scientific mathematical modeling nowadays. Recently, some important questions has been arises in researchers mind that if someone want to construct linear and non-linear trapezoidal bipolar neutrosophic number then what will the mathematical form of the membership functions? What will be the graphical representation and significance of both linear and non-linear trapezoidal bipolar neutrosophic number? Also, how can we classify class—1, 2, 3 of linear trapezoidal bipolar neutrosophic number and its disjunctive forms in case of dependency and independency of the membership functions? Instead of these question further, there is a burning question arises in human thinking that how could we relate this number with the crisp number that is, what will be the technique of crispification in bipolar-neutrosophic logic? In this feature, we shall try to create the article but again we faced some logical question like what will be the application arena of this proposed number and can we utilize this number in cloud service-based decision making theory? Also, if the attribute values are changed in a certain limit what will be the effect in case of ranking? To find out the answers of these raised questions we started our

work to establish this article in trapezoidal bipolar-neutrosophic domain.

Novelties of the work

Various research idea had been previously published in neutrosophic ground specifically in bipolar domain. Different types of formulations, application and simulations are developed by researchers in this field. Moreover, some important results and analysis are still unrevealed. We shall try to solve these unknown points describes below:

- (i) Formulation of linear TrBNN.
- (ii) Classification of the proposed number (Category 1, 2, 3) according to dependency and independency of the membership functions.
- (iii) Geometrical importance and significance of linear TrBNN.
- (iv) Structure of generalized linear form of TrBNN.
- (v) Establishment of non- linear trapezoidal bipolar neutrosophic number.
- (vi) Geometrical representation of Non- linear form of the proposed number.
- (vii) Computation of de-bipolarization technique for TrBNN, i.e., the crispification skill.
- (viii) Construction of cloud service provider-related hypothetical MCGDM problem in bipolar-neutro arena and finally it's ranking in a logical way.
- (ix) Sensitivity analysis of the proposed MCGDM method for different attribute weights.
- (x) Formulation of Sensitivity chart and Comparison of proposed work with the other published work.

Verbal phrase-related neutrosophic idea

In our daily life, some researchers often focused on the point that how anyone can establish a logical relationship between neutrosophic conception and the real life problem with the help of verbal phrase concept? In this phenomenon, we shall

try to construct an idea such that this raised question can be revealed so easily.

Example 1.1 Suppose we need to construct a committee from the group members maintain the democratic way in an important meeting. Thus, this will be a problem of vote casting. Member have different sentiments, feelings, hope, ethics, dream etc. Thus in vagueness aspect we can select different kind of vagueness parameters like fuzzy, intuitionistic, neutrosophic numbers etc. Here, we construct verbal phrases in various environment for this given problem (Table 1).

Mathematical preliminaries

Definition 2.1 Fuzzy set: [1] A set \tilde{S} , defined as $\tilde{S} = \{(A, \varphi_{\tilde{S}}(A)) : A \in S, \varphi_{\tilde{S}}(A) \in [0, 1]\}$ and usually denoted by the pair as $(A, \varphi_{\tilde{S}}(A))$, $A \in S$ and $\varphi_{\tilde{S}}(A) \in [0, 1]$, then \tilde{S} is said to be a fuzzy set.

Definition 2.2 Neutrosophic set: [5] A set \tilde{T} is identified as a neutrosophic set if $\tilde{T} = \{ \langle p; [\tau_{\tilde{T}}(p), \psi_{\tilde{T}}(p), \varphi_{\tilde{T}}(p)] \rangle : x \in P, P = \text{universal set} \}$, where $\tau_{\tilde{T}}(p) : P \rightarrow [0, 1]$ signifies the scale of confidence, $\psi_{\tilde{T}}(p) : P \rightarrow [0, 1]$ signifies the scale of hesitation and $\varphi_{\tilde{T}}(p) : P \rightarrow [0, 1]$ signifies the scale of falseness. Where, $\tau_{\tilde{T}}(p)$, $\psi_{\tilde{T}}(p)$ and $\varphi_{\tilde{T}}(p)$ satisfies the relation:

$$-0 \leq \tau_{\tilde{T}}(p) + \psi_{\tilde{T}}(p) + \varphi_{\tilde{T}}(p) \leq 3 + .$$

Definition 2.3 Single typed neutrosophic number: (\tilde{N}) is called STNN, if it can be written as $\tilde{N} = \langle [(a^1, b^1, c^1, d^1); \mu], [(a^2, b^2, c^2, d^2); \rho], [(a^3, b^3, c^3, d^3); \sigma] \rangle$ where $\mu, \rho, \sigma \in [0, 1]$, where $(\tau_{\tilde{N}}) : \mathbb{R} \rightarrow [0, \mu]$, $(\psi_{\tilde{N}}) : \mathbb{R} \rightarrow [\rho, 1]$ and $(\varphi_{\tilde{N}}) : \mathbb{R} \rightarrow [\sigma, 1]$ is given as:

Table 1 Verbal phrases for different uncertain number

Various parameter	Verbal phrase	Details
Interval valued number	[Poor, large]	Members will choose according to their 1st choice within a fixed choice like [4th, 5th] nominees
Trapezoidal fuzzy number	[Poor, semi median, moderate median, large]	Elector will choose according to their 1st choice a suitable candidate within $[a, b, c]$ say
Trapezoidal intuitionistic fuzzy	[Poor, ordinary, middle, high; very poor, semi poor, moderate, high]	Elector will choose any nominee frankly and discard others instantly according to their vision
Trapezoidal bipolar neutrosophic number	[Standard, semi high, moderate high, very high; intermediate, average, semi median, moderate median; very low, semi poor, moderate poor, high]	A few electors will choose frankly any of the candidates, few of them are in dilemma in casting ballot and few of them straight discard voting according to their own vision

$$\tau_{\tilde{N}}(p) = \begin{cases} \tau_{\tilde{N}_l}(p) & \text{when } a^1 \leq p \leq b^1 \\ \mu & \text{when } b^1 \leq p \leq c^1 \\ \tau_{\tilde{N}_u}(p) & \text{when } c^1 \leq p \leq d^1 \\ 0 & \text{otherwise} \end{cases},$$

$$\psi_{\tilde{N}}(x) = \begin{cases} \psi_{\tilde{N}_l}(p) & \text{when } a^2 \leq p \leq b^2 \\ \rho & \text{when } b^2 \leq p \leq c^2 \\ \psi_{\tilde{N}_u}(p) & \text{when } c^2 \leq p \leq d^2 \\ 1 & \text{otherwise} \end{cases},$$

and

$$\varphi_{\tilde{N}}(p) = \begin{cases} \varphi_{\tilde{N}_l}(p) & \text{when } a^3 \leq p \leq b^3 \\ \gamma & \text{when } b^3 \leq p \leq c^3 \\ \varphi_{\tilde{N}_u}(p) & \text{when } c^3 \leq p \leq d^3 \\ 1 & \text{otherwise} \end{cases}.$$

Definition 2.4 Bipolar neutrosophic set: A set \tilde{T}_{Bi} is identified as BNS if, $\tilde{T}_{Bi} = \{ \langle p; [\tau_{\tilde{T}_{Bi}}^+(p), \psi_{\tilde{T}_{Bi}}^+(p), \varphi_{\tilde{T}_{Bi}}^+(p), \tau_{\tilde{T}_{Bi}}^-(p), \psi_{\tilde{T}_{Bi}}^-(p), \varphi_{\tilde{T}_{Bi}}^-(p)] : p \in P \}$, where $\tau_{\tilde{T}_{Bi}}^+(p) : P \rightarrow [0,1]$, $\tau_{\tilde{T}_{Bi}}^-(p) : P \rightarrow [-1,0]$, signifies the scale of confidence, $\psi_{\tilde{T}_{Bi}}^+(p) : P \rightarrow [0,1]$, $\psi_{\tilde{T}_{Bi}}^-(p) : P \rightarrow [-1,0]$ signifies

the scale of hesitation and $\varphi_{\tilde{T}_{Bi}}^+(p) : P \rightarrow [0,1]$, $\varphi_{\tilde{T}_{Bi}}^-(p) : P \rightarrow [-1,0]$ signifies the scale of falseness.

Single type linear trapezoidal bipolar neutrosophic number

This block diagram shows various types of uncertain parameters and their classifications (Fig. 1).

Trapezoidal single typed bipolar neutrosophic number of category 1: the portion of the validity, indecision and negation are independent

A single typed TrBNN of Category 1 is described as:

$$\tilde{S}_{BiTr} = (e_1, e_2, e_3; f_1, f_2, f_3; g_1, g_2, g_3).$$

Whose validity, indecision and negation membership function portions are scaled as:

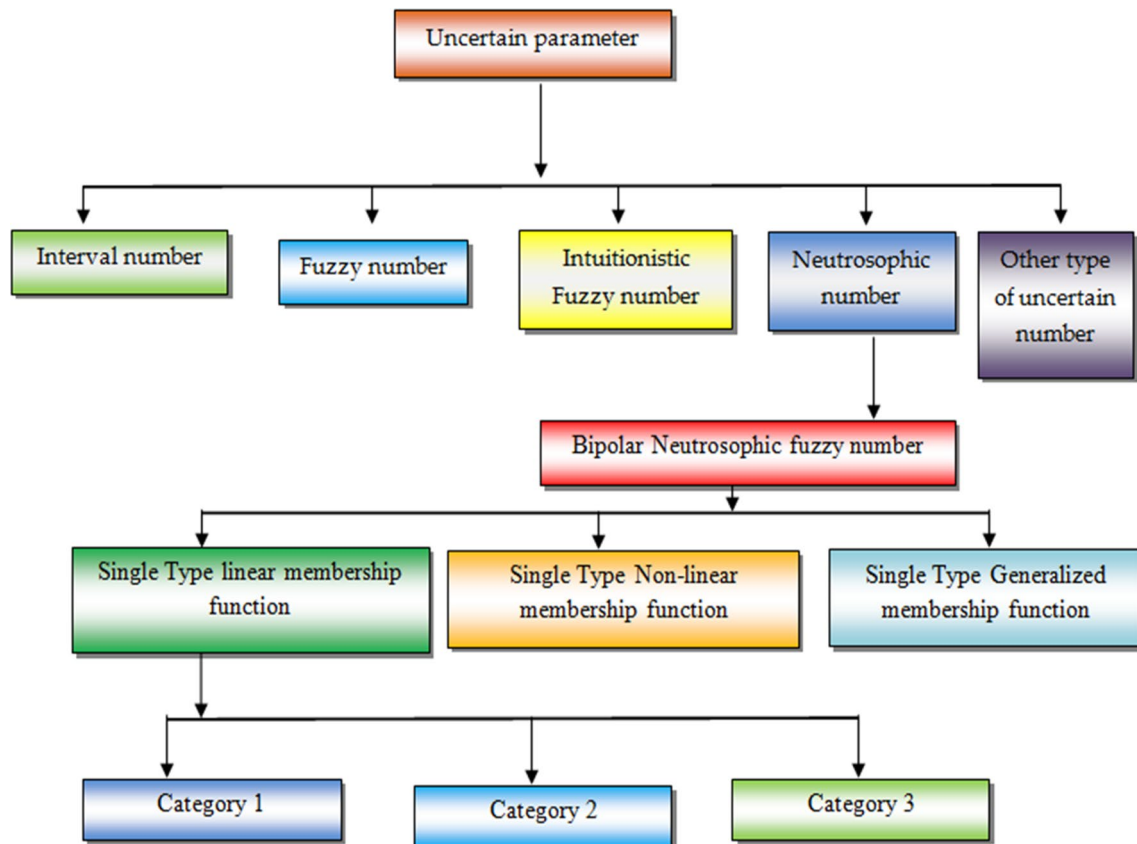


Fig. 1 Schematic map for special types of single type linear trapezoidal bipolar neutrosophic number

$$T_{\tilde{s}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{x-e_1}{e_2-e_1} & \text{when } e_1 \leq x < e_2 \\ 1 & \text{when } e_2 \leq x \leq e_3 \\ \frac{e_4-x}{e_4-e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

$$T_{\tilde{s}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{e_2-x}{e_2-e_1} & \text{when } e_1 \leq x < e_2 \\ -1 & \text{when } e_2 \leq x \leq e_3 \\ \frac{x-e_4}{e_4-e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

and

$$I_{\tilde{s}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{f_2-x}{f_2-f_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \frac{x-f_4}{f_4-f_3} & \text{when } f_3 < x \leq f_4 \\ 1 & \text{otherwise} \end{cases},$$

$$I_{\tilde{s}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{x-f_2}{f_2-f_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \frac{f_4-x}{f_4-f_3} & \text{when } f_3 < x \leq f_4 \\ -1 & \text{otherwise} \end{cases},$$

and

$$F_{\tilde{s}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{g_2-x}{g_2-g_1} & \text{when } g_1 \leq x < g_2 \\ 0 & \text{when } g_2 \leq x \leq g_3 \\ \frac{x-g_4}{g_4-g_3} & \text{when } g_3 < x \leq g_4 \\ 1 & \text{otherwise} \end{cases},$$

$$F_{\tilde{s}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{x-g_2}{g_2-g_1} & \text{when } g_1 \leq x < g_2 \\ 0 & \text{when } g_2 \leq x \leq g_3 \\ \frac{g_4-x}{g_4-g_3} & \text{when } g_3 < x \leq g_4 \\ -1 & \text{otherwise} \end{cases},$$

where $-3 \leq T_{\tilde{s}_{\text{BiTr}}}(x) + I_{\tilde{s}_{\text{BiTr}}}(x) + F_{\tilde{s}_{\text{BiTr}}}(x) \leq 3$ and $x \in \tilde{s}_{\text{BiTr}}$.

Note: Here, $T_{\tilde{s}_{\text{BiTr}}}^+$ and $T_{\tilde{s}_{\text{BiTr}}}^-$ represents the positive part and negative part of validity membership function $T_{\tilde{s}_{\text{BiTr}}}$, respectively, $I_{\tilde{s}_{\text{BiTr}}}^+$ and $I_{\tilde{s}_{\text{BiTr}}}^-$ represents the positive part and negative part of indecision membership function $I_{\tilde{s}_{\text{BiTr}}}$,

respectively, and $F_{\tilde{s}_{\text{BiTr}}}^+$ and $F_{\tilde{s}_{\text{BiTr}}}^-$ represents the positive part and negative part of negation membership function $F_{\tilde{s}_{\text{BiTr}}}$, respectively, of trapezoidal single typed bipolar neutrosophic number of Category 1.

Parametric form of the number

The parametric form or (α, β, γ) —cut form of the developed category-1 number is describes as follows:

$$(\tilde{s}_{\text{BiTr}})_{\alpha, \beta, \gamma} = [T_{\text{BiTr1}}^+(\alpha), T_{\text{BiTr2}}^+(\alpha); I_{\text{BiTr1}}^+(\beta), I_{\text{BiTr2}}^+(\beta); F_{\text{BiTr1}}^+(\gamma), F_{\text{BiTr2}}^+(\gamma)],$$

where $T_{\text{BiTr1}}^+(\alpha) = e_1 + \alpha(e_2 - e_1)$, $T_{\text{BiTr2}}^+(\alpha) = e_4 - \alpha(e_4 - e_3)$,

$$T_{\text{BiTr1}}^-(\alpha) = e_2 - \alpha(e_2 - e_1), T_{\text{BiTr2}}^-(\alpha) = e_4 + \alpha(e_4 - e_3),$$

$$I_{\text{BiTr1}}^+(\beta) = f_2 - \beta(f_2 - f_1), I_{\text{BiTr2}}^+(\beta) = f_3 + \beta(f_4 - f_3),$$

$$I_{\text{BiTr1}}^-(\beta) = f_2 + \beta(f_2 - f_1), I_{\text{BiTr2}}^-(\beta) = f_3 - \beta(f_4 - f_3),$$

$$F_{\text{BiTr1}}^+(\gamma) = g_2 - \gamma(g_2 - g_1), F_{\text{BiTr2}}^+(\gamma) = g_3 + \gamma(g_4 - g_3),$$

$$F_{\text{BiTr1}}^-(\gamma) = g_2 + \gamma(g_2 - g_1), F_{\text{BiTr2}}^-(\gamma) = g_3 - \gamma(g_4 - g_3).$$

Here, $-1 \leq \alpha \leq 1$, $-1 \leq \beta \leq 1$, $-1 \leq \gamma \leq 1$ and $-3 \leq \alpha + \beta + \gamma \leq 3$.

Note: Here, $T_{\text{BiTr}}^+(\alpha), T_{\text{BiTr}}^-(\alpha); I_{\text{BiTr}}^+(\beta), I_{\text{BiTr}}^-(\beta); F_{\text{BiTr}}^+(\gamma), F_{\text{BiTr}}^-(\gamma)$ denotes the (α, β, γ) —cut form of positive and negative validity, indecision and negation membership function of trapezoidal single typed bipolar neutrosophic number of Category 1.

Trapezoidal single typed bipolar neutrosophic number of category 2: the portion of indecision and negation are dependent

A single typed TrBNN of Category 2 is described as $\tilde{s}_{\text{BiTr}} = (e_1, e_2, e_3; f_1, f_2, f_3; s_{\text{BN}}, t_{\text{BN}})$ whose validity, indecision and negation membership function is scaled as:

$$T_{\tilde{s}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{x-e_1}{e_2-e_1} & \text{when } e_1 \leq x < e_2 \\ 1 & \text{when } e_2 \leq x \leq e_3 \\ \frac{e_4-x}{e_4-e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

$$T_{\tilde{s}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{e_2-x}{e_2-e_1} & \text{when } e_1 \leq x < e_2 \\ -1 & \text{when } x = e_2 \leq x \leq e_3 \\ \frac{x-e_4}{e_4-e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

and

$$I_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{f_2 - x + s_{\text{BN}}(x - f_1)}{f_2 - f_1} & \text{when } f_1 \leq x < f_2 \\ s_{\text{BN}} & \text{when } f_2 \leq x \leq f_3 \\ \frac{x - f_3 + s_{\text{BN}}(f_4 - x)}{f_4 - f_3} & \text{when } f_3 < x \leq f_4 \\ 1 & \text{otherwise} \end{cases},$$

$$I_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{x - f_1 + s_{\text{BN}}(f_2 - x)}{f_2 - f_1} & \text{when } f_1 \leq x < f_2 \\ s_{\text{BN}} & \text{when } f_2 \leq x \leq f_3 \\ \frac{f_4 - x + s_{\text{BN}}(x - f_3)}{f_4 - f_3} & \text{when } f_3 < x \leq f_4 \\ -1 & \text{otherwise} \end{cases},$$

and

$$F_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{f_2 - x + t_{\text{BN}}(x - f_1)}{f_2 - f_1} & \text{when } f_1 \leq x < f_2 \\ t_{\text{BN}} & \text{when } f_2 \leq x \leq f_3 \\ \frac{x - f_3 + t_{\text{BN}}(f_4 - x)}{f_4 - f_3} & \text{when } f_3 < x \leq f_4 \\ 1 & \text{otherwise} \end{cases},$$

$$F_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{x - f_1 + t_{\text{BN}}(f_2 - x)}{f_2 - f_1} & \text{when } f_1 \leq x < f_2 \\ t_{\text{BN}} & \text{when } f_2 \leq x \leq f_3 \\ \frac{f_4 - x + t_{\text{BN}}(x - f_3)}{f_4 - f_3} & \text{when } f_3 < x \leq f_4 \\ -1 & \text{otherwise} \end{cases},$$

where $-2 \leq T_{\tilde{S}_{\text{BiTr}}}^+(x) + I_{\tilde{S}_{\text{BiTr}}}^-(x) + F_{\tilde{S}_{\text{BiTr}}}^-(x) \leq 2$ and $x \in \tilde{S}_{\text{BiTr}}$.

Note: Here, $T_{\tilde{S}_{\text{BiTr}}}^+$ and $T_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of validity membership function $T_{\tilde{S}_{\text{BiTr}}}$, respectively, $I_{\tilde{S}_{\text{BiTr}}}^+$ and $I_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of indecision membership function $I_{\tilde{S}_{\text{BiTr}}}$, respectively, and $F_{\tilde{S}_{\text{BiTr}}}^+$ and $F_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of negation membership function $F_{\tilde{S}_{\text{BiTr}}}$, respectively, of trapezoidal single typed bipolar neutrosophic number of Category 2. Also, here $I_{\tilde{S}_{\text{BiTr}}}$ and $F_{\tilde{S}_{\text{BiTr}}}$ are dependent to each other.

Parametric form of the number

The parametric form or the (α, β, γ) —cut form of the developed category-2 number is describes as follows:

$$(\tilde{S}_{\text{BiTr}})_{\alpha, \beta, \gamma} = [T_{\text{BiTr1}}(\alpha), T_{\text{BiTr2}}(\alpha); I_{\text{BiTr1}}(\beta), I_{\text{BiTr2}}(\beta); F_{\text{BiTr1}}(\gamma), F_{\text{BiTr2}}(\gamma)],$$

where

$$T_{\text{BiTr1}}^+(\alpha) = e_1 + \alpha(e_2 - e_1), \quad T_{\text{BiTr2}}^+(\alpha) = e_4 - \alpha(e_4 - e_3),$$

$$T_{\text{BiTr1}}^-(\alpha) = e_2 - \alpha(e_2 - e_1), \quad T_{\text{BiTr2}}^-(\alpha) = e_4 + \alpha(e_4 - e_3),$$

$$I_{\text{BiTr1}}^+(\beta) = \frac{f_2 - s_{\text{BN}}f_1 - \beta(f_2 - f_1)}{1 - u_{\text{BN}}},$$

$$I_{\text{BiTr2}}^+(\beta) = \frac{f_3 - s_{\text{BN}}f_4 + \beta(f_4 - f_3)}{1 - u_{\text{BN}}},$$

$$I_{\text{BiTr1}}^-(\beta) = \frac{f_1 - s_{\text{BN}}f_2 + \beta(f_2 - f_1)}{1 - u_{\text{BN}}},$$

$$I_{\text{BiTr2}}^-(\beta) = \frac{f_4 - s_{\text{BN}}f_3 - \beta(f_4 - f_3)}{1 - u_{\text{BN}}},$$

$$F_{\text{BiTr1}}^+(\gamma) = \frac{f_2 - t_{\text{BN}}f_1 - \gamma(f_2 - f_1)}{1 - y_{\text{BN}}},$$

$$F_{\text{BiTr2}}^+(\gamma) = \frac{f_3 - t_{\text{BN}}f_4 + \gamma(f_4 - f_3)}{1 - y_{\text{BN}}},$$

$$F_{\text{BiTr1}}^-(\gamma) = \frac{f_1 - t_{\text{BN}}f_2 + \gamma(f_2 - f_1)}{1 - y_{\text{BN}}},$$

$$F_{\text{BiTr2}}^-(\gamma) = \frac{f_4 - t_{\text{BN}}f_3 - \gamma(f_4 - f_3)}{1 - y_{\text{BN}}},$$

Here, $-1 \leq \alpha \leq 1$, $s_{\text{BN}} \leq \beta \leq 1$, $t_{\text{BN}} \leq \gamma \leq 1$ and $-1 \leq \beta + \gamma \leq 1$ and $-1 \leq \alpha + \beta + \gamma \leq 2$.

Note: Here, $T_{\text{BiTr}}^+(\alpha)$, $T_{\text{BiTr}}^-(\alpha)$; $I_{\text{BiTr}}^+(\beta)$, $I_{\text{BiTr}}^-(\beta)$; $F_{\text{BiTr}}^+(\gamma)$, $F_{\text{BiTr}}^-(\gamma)$ denotes the α, β, γ —cut form of positive and negative validity, indecision and negation membership function of trapezoidal single typed bipolar neutrosophic number of Category 2.

Trapezoidal single typed bipolar neutrosophic number of category 3: the portion of the validity, indecision and negation are dependent

A single typed TrBNN of Category 3 is described as $\tilde{S}_{\text{BiTr}} = (e_1, e_2, e_3; q_{\text{BN}}, s_{\text{BN}}, t_{\text{BN}})$ whose validity, indecision and negation membership function is scaled as:

$$T_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} q_{\text{BN}} \frac{x - e_1}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ q_{\text{BN}} & \text{when } e_2 \leq x \leq e_3 \\ q_{\text{BN}} \frac{e_4 - x}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

$$T_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} q_{\text{BN}} \frac{e_2 - x}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ q_{\text{BN}} & \text{when } e_2 \leq x \leq e_3 \\ q_{\text{BN}} \frac{x - e_4}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

and

$$I_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{e_2 - x + s_{\text{BN}}(x - e_1)}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ s_{\text{BN}} & \text{when } e_2 \leq x \leq e_3 \\ \frac{x - e_3 + s_{\text{BN}}(e_4 - x)}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ 1 & \text{otherwise} \end{cases},$$

$$I_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{x - e_1 + s_{\text{BN}}(e_2 - x)}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ s_{\text{BN}} & \text{when } e_2 \leq x \leq e_3 \\ \frac{e_4 - x + s_{\text{BN}}(x - e_3)}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ -1 & \text{otherwise} \end{cases},$$

and

$$F_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \frac{e_2 - x + t_{\text{BN}}(x - e_1)}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ t_{\text{BN}} & \text{when } e_2 \leq x \leq e_3 \\ \frac{x - e_3 + t_{\text{BN}}(e_4 - x)}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ 1 & \text{otherwise} \end{cases},$$

$$F_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \frac{x - e_1 + t_{\text{BN}}(e_2 - x)}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ t_{\text{BN}} & \text{when } e_2 \leq x \leq e_3 \\ \frac{e_4 - x + t_{\text{BN}}(x - e_3)}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ -1 & \text{otherwise} \end{cases},$$

where $-1 \leq T_{\tilde{S}_{\text{BiTr}}}(x) + I_{\tilde{S}_{\text{BiTr}}}(x) + F_{\tilde{S}_{\text{BiTr}}}(x) \leq 1, x \in \tilde{S}_{\text{BiTr}}$.

Note: Here, $T_{\tilde{S}_{\text{BiTr}}}^+$ and $T_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of validity membership function $T_{\tilde{S}_{\text{BiTr}}}$, respectively, $I_{\tilde{S}_{\text{BiTr}}}^+$ and $I_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of indecision membership function $I_{\tilde{S}_{\text{BiTr}}}$, respectively, and $F_{\tilde{S}_{\text{BiTr}}}^+$ and $F_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of negation membership function $F_{\tilde{S}_{\text{BiTr}}}$, respectively, of trapezoidal single typed bipolar neutrosophic number of Category 3. Also, here $T_{\tilde{S}_{\text{BiTr}}}$, $I_{\tilde{S}_{\text{BiTr}}}$ and $F_{\tilde{S}_{\text{BiTr}}}$ are dependent to each other.

Parametric form of the number

The parametric form or the (α, β, γ) —cut form of the developed category-3 number is describes as follows:

$$(\tilde{S}_{\text{BiTr}})_{\alpha, \beta, \gamma} = [T_{\text{BiTr1}}(\alpha), T_{\text{BiTr2}}(\alpha); I_{\text{BiTr1}}(\beta), I_{\text{BiTr2}}(\beta); F_{\text{BiTr1}}(\gamma), F_{\text{BiTr2}}(\gamma)],$$

where $T_{\text{BiTr1}}^+(\alpha) = e_1 + \frac{\alpha}{q_{\text{BN}}}(e_2 - e_1)$, $T_{\text{BiTr2}}^+(\alpha) = e_4 - \frac{\alpha}{q_{\text{BN}}}(e_4 - e_3)$,

$$T_{\text{BiTr1}}^-(\alpha) = e_2 - \frac{\alpha}{q_{\text{BN}}}(e_2 - e_1), T_{\text{BiTr2}}^-(\alpha) = e_4 + \frac{\alpha}{q_{\text{BN}}}(e_4 - e_3),$$

$$I_{\text{BiTr1}}^+(\beta) = \frac{e_2 - s_{\text{BN}}e_1 - \beta(e_2 - e_1)}{1 - s_{\text{BN}}},$$

$$I_{\text{BiTr2}}^+(\beta) = \frac{e_3 - s_{\text{BN}}e_4 + \beta(e_4 - e_3)}{1 - s_{\text{BN}}},$$

$$I_{\text{BiTr1}}^-(\beta) = \frac{e_1 - s_{\text{BN}}e_2 + \beta(e_2 - e_1)}{1 - s_{\text{BN}}},$$

$$I_{\text{BiTr2}}^-(\beta) = \frac{e_4 - s_{\text{BN}}e_3 - \beta(e_4 - e_3)}{1 - s_{\text{BN}}},$$

$$F_{\text{BiTr1}}^+(\gamma) = \frac{e_2 - t_{\text{BN}}e_1 - \gamma(e_2 - e_1)}{1 - t_{\text{BN}}},$$

$$F_{\text{BiTr2}}^+(\gamma) = \frac{e_3 - t_{\text{BN}}e_4 + \gamma(e_4 - e_3)}{1 - t_{\text{BN}}},$$

$$F_{\text{BiTr1}}^-(\gamma) = \frac{e_1 - t_{\text{BN}}e_2 + \gamma(e_2 - e_1)}{1 - t_{\text{BN}}},$$

$$F_{\text{BiTr2}}^-(\gamma) = \frac{e_3 - t_{\text{BN}}e_3 - \gamma(e_4 - e_3)}{1 - t_{\text{BN}}},$$

Here, $-1 \leq \alpha \leq q_{\text{BN}}, s_{\text{BN}} \leq \beta \leq 1, t_{\text{BN}} \leq \gamma \leq 1$ and $-1 \leq \alpha + \beta + \gamma \leq 1$.

Note: Here, $T_{\text{BiTr}}^+(\alpha), T_{\text{BiTr}}^-(\alpha); I_{\text{BiTr}}^+(\beta), I_{\text{BiTr}}^-(\beta); F_{\text{BiTr}}^+(\gamma), F_{\text{BiTr}}^-(\gamma)$ denotes the α, β, γ —cut form of positive

and negative validity, indecision and negation membership function of trapezoidal single typed bipolar neutrosophic number of Category 3.

Single typed non-linear trapezoidal bipolar neutrosophic number

Single typed non-linear trapezoidal bipolar neutrosophic number

A single typed non linear TrBNN is precise as $\tilde{S}_{\text{BiTr}} = (e_1, e_2, e_3; f_1, f_2, f_3; g_1, g_2, g_3 | p_1, p_2; q_1, q_2; r_1, r_2)$ whose validity, indecision and negation membership function is scaled as:

$$T_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \left(\frac{x-e_1}{e_2-e_1}\right)^{p_1} & \text{when } e_1 \leq x < e_2 \\ 1 & \text{when } e_2 \leq x \leq e_3 \\ \left(\frac{e_4-x}{e_4-e_3}\right)^{p_2} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

$$T_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \left(\frac{e_2-x}{e_2-e_1}\right)^{p_1} & \text{when } e_1 \leq x < e_2 \\ -1 & \text{when } e_2 \leq x \leq e_3 \\ \left(\frac{x-e_4}{e_4-e_3}\right)^{p_2} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

and

$$I_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \left(\frac{x-f_1}{f_2-f_1}\right)^{q_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \left(\frac{x-f_4}{f_4-f_3}\right)^{q_2} & \text{when } f_3 < x \leq f_4 \\ 1 & \text{otherwise} \end{cases},$$

$$I_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \left(\frac{x-f_2}{f_2-f_1}\right)^{q_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \left(\frac{f_3-x}{f_4-f_3}\right)^{q_2} & \text{when } f_3 < x \leq f_4 \\ -1 & \text{otherwise} \end{cases},$$

and

$$F_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \left(\frac{x-g_1}{g_2-g_1}\right)^{r_1} & \text{when } g_1 \leq x < g_2 \\ 0 & \text{when } g_2 \leq x \leq g_3 \\ \left(\frac{x-g_4}{g_4-g_3}\right)^{r_2} & \text{when } g_3 < x \leq g_4 \\ 1 & \text{otherwise} \end{cases},$$

$$F_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \left(\frac{x-g_2}{g_2-g_1}\right)^{r_1} & \text{when } g_1 \leq x < g_2 \\ 0 & \text{when } g_2 \leq x \leq g_3 \\ \left(\frac{x-g_4}{g_4-g_3}\right)^{r_2} & \text{when } g_3 < x \leq g_4 \\ -1 & \text{otherwise} \end{cases},$$

where $T_{\tilde{S}_{\text{BiTr}}}^+(x) : X \in [0,1]$, $T_{\tilde{S}_{\text{BiTr}}}^-(x) : X \in [-1,0]$, $I_{\tilde{S}_{\text{BiTr}}}^+(x) : X \in [0,1]$,

$I_{\tilde{S}_{\text{BiTr}}}^-(x) : X \in [-1,0]$, $F_{\tilde{S}_{\text{BiTr}}}^+(x) : X \in [0,1]$, $F_{\tilde{S}_{\text{BiTr}}}^-(x) : X \in [-1,0]$.

Note: Here, $T_{\tilde{S}_{\text{BiTr}}}^+$ and $T_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of validity membership function $T_{\tilde{S}_{\text{BiTr}}}$, respectively, $I_{\tilde{S}_{\text{BiTr}}}^+$ and $I_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of indecision membership function $I_{\tilde{S}_{\text{BiTr}}}$, respectively, and $F_{\tilde{S}_{\text{BiTr}}}^+$ and $F_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of negation membership function $F_{\tilde{S}_{\text{BiTr}}}$, respectively, of single typed non-linear trapezoidal bipolar neutrosophic number (Fig. 2).

Single typed generalized trapezoidal bipolar neutrosophic number

A single typed generalized TrBNN is precise as $\tilde{S}_{\text{BiTr}} = (e_1, e_2, e_3; f_1, f_2, f_3; g_1, g_2, g_3 | \omega; \rho;)$ whose validity, indecision and negation membership function is scaled as:

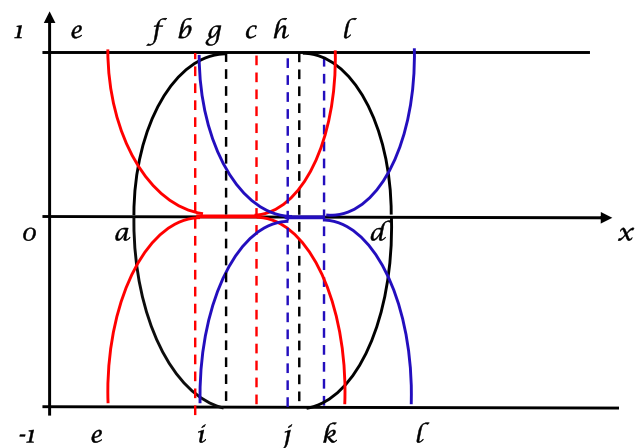


Fig. 2 Non-linear trapezoidal bipolar neutrosophic number

$$T_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \omega \frac{x - e_1}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ \omega & \text{when } e_2 \leq x \leq e_3 \\ \omega \frac{e_4 - x}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

$$T_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \omega \frac{e_2 - x}{e_2 - e_1} & \text{when } e_1 \leq x < e_2 \\ -\omega & \text{when } e_2 \leq x \leq e_3 \\ \omega \frac{x - e_4}{e_4 - e_3} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

and

$$I_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \rho \frac{x - f_1}{f_2 - f_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \rho \frac{x - f_4}{f_4 - f_3} & \text{when } f_3 < x \leq f_4 \\ \rho & \text{otherwise} \end{cases},$$

$$I_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \rho \frac{f_2 - x}{f_2 - f_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \rho \frac{f_4 - x}{f_4 - f_3} & \text{when } f_3 < x \leq f_4 \\ -\rho & \text{otherwise} \end{cases},$$

and

$$F_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \lambda \frac{x - g_1}{g_2 - g_1} & \text{when } g_1 \leq x < g_2 \\ 0 & \text{when } g_2 \leq x \leq g_3 \\ \lambda \frac{x - g_4}{g_4 - g_3} & \text{when } g_3 < x \leq g_4 \\ \lambda & \text{otherwise} \end{cases},$$

$$F_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \lambda \frac{f_2 - x}{f_2 - f_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \lambda \frac{f_4 - x}{f_4 - f_3} & \text{when } f_3 < x \leq f_4 \\ -\lambda & \text{otherwise} \end{cases},$$

where $-3 \leq T_{\tilde{S}_{\text{BiTr}}}^+(x) + I_{\tilde{S}_{\text{BiTr}}}^-(x) + F_{\tilde{S}_{\text{BiTr}}}^-(x) \leq 3$ and $x \in \tilde{S}_{\text{BiTr}}$.

Note: Here, $T_{\tilde{S}_{\text{BiTr}}}^+$ and $T_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of validity membership function $T_{\tilde{S}_{\text{BiTr}}}$, respectively, $I_{\tilde{S}_{\text{BiTr}}}^+$ and $I_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of indecision membership function $I_{\tilde{S}_{\text{BiTr}}}$, respectively, and $F_{\tilde{S}_{\text{BiTr}}}^+$ and $F_{\tilde{S}_{\text{BiTr}}}^-$ represents the positive part and negative part of negation membership function $F_{\tilde{S}_{\text{BiTr}}}$, respectively, of single typed non-linear trapezoidal bipolar neutrosophic number.

Single typed generalized non linear trapezoidal bipolar neutrosophic number

A single typed non linear generalized TrBNN with nine components is precise as $\tilde{A}_{\text{BiNeu}} = (e_1, e_2, e_3; f_1, f_2, f_3; g_1, g_2, g_3 | p_1, p_2; q_1, q_2; r_1, r_2 : \omega; \rho;)$ whose validity, indecision and negation membership function is scaled as:

$$T_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \omega \left(\frac{x - e_1}{e_2 - e_1} \right)^{p_1} & \text{when } e_1 \leq x < e_2 \\ \omega & \text{when } e_2 \leq x \leq e_3 \\ \omega \left(\frac{e_4 - x}{e_4 - e_3} \right)^{p_2} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

$$T_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \omega \left(\frac{x - e_1}{e_2 - e_1} \right)^{p_1} & \text{when } e_1 \leq x < e_2 \\ \omega & \text{when } e_2 \leq x \leq e_3 \\ \omega \left(\frac{e_4 - x}{e_4 - e_3} \right)^{p_2} & \text{when } e_3 < x \leq e_4 \\ 0 & \text{otherwise} \end{cases},$$

and

$$I_{\tilde{S}_{\text{BiTr}}}^+(x) = \begin{cases} \rho \left(\frac{x - f_1}{f_2 - f_1} \right)^{q_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \rho \left(\frac{x - f_4}{f_4 - f_3} \right)^{q_2} & \text{when } f_3 < x \leq f_4 \\ \rho & \text{otherwise} \end{cases},$$

$$I_{\tilde{S}_{\text{BiTr}}}^-(x) = \begin{cases} \rho \left(\frac{f_2 - x}{f_2 - f_1} \right)^{q_1} & \text{when } f_1 \leq x < f_2 \\ 0 & \text{when } f_2 \leq x \leq f_3 \\ \rho \left(\frac{f_4 - x}{f_4 - f_3} \right)^{q_2} & \text{when } f_3 < x \leq f_4 \\ \rho & \text{otherwise} \end{cases},$$

and

$$F_{\tilde{s}_{\text{BiTr}}}^+(x) = \begin{cases} \lambda \left(\frac{x - g_1}{g_2 - g_1} \right)^{r_1} & \text{when } g_1 \leq x < g_2 \\ 0 & \text{when } g_2 \leq x \leq g_3 \\ \lambda \left(\frac{x - g_4}{g_4 - g_3} \right)^{r_2} & \text{when } g_3 < x \leq g_4 \\ \lambda & \text{otherwise} \end{cases},$$

$$F_{\tilde{s}_{\text{BiTr}}}^-(x) = \begin{cases} \lambda \left(\frac{g_2 - x}{g_2 - g_1} \right)^{r_1} & \text{when } g_1 \leq x < g_2 \\ 0 & \text{when } g_2 \leq x \leq g_3 \\ \lambda \left(\frac{g_4 - x}{g_4 - g_3} \right)^{r_2} & \text{when } g_3 < x \leq g_4 \\ -\lambda & \text{otherwise} \end{cases},$$

where

$$T_{\tilde{s}_{\text{BiTr}}}^+(x) : X \in [0,1], T_{\tilde{s}_{\text{BiTr}}}^-(x) : X \in [-1,0], I_{\tilde{s}_{\text{BiTr}}}^+(x) : X \in [0,1], I_{\tilde{s}_{\text{BiTr}}}^-(x) : X \in [-1,0]$$

$$F_{\tilde{s}_{\text{BiTr}}}^+(x) : X \in [0,1], F_{\tilde{s}_{\text{BiTr}}}^-(x) : X \in [-1,0].$$

Note: Here, $T_{\tilde{s}_{\text{BiTr}}}^+$ and $T_{\tilde{s}_{\text{BiTr}}}^-$ represents the positive part and negative part of validity membership function $T_{\tilde{s}_{\text{BiTr}}}$, respectively, $I_{\tilde{s}_{\text{BiTr}}}^+$ and $I_{\tilde{s}_{\text{BiTr}}}^-$ represents the positive part and negative part of indecision membership function $I_{\tilde{s}_{\text{BiTr}}}$, respectively, and $F_{\tilde{s}_{\text{BiTr}}}^+$ and $F_{\tilde{s}_{\text{BiTr}}}^-$ represents the positive part and negative part of negation membership function $F_{\tilde{s}_{\text{BiTr}}}$, respectively, of single typed generalized non linear trapezoidal bipolar neutrosophic number.

De-bipolarization technique of linear TrBNN

It is a technique in which we can generate a certain fixed crisp value corresponding to a TrBNN in a logical way utilizing a suitable skill. All around the whole world

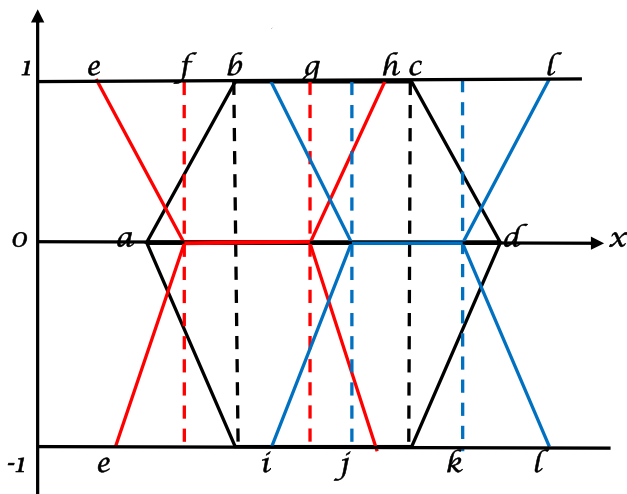


Fig. 3 Linear trapezoidal bipolar neutrosophic number

researchers from every states have been interested about the fact that what will be the equivalent crisp value coupled with TrBNN? Gradually, researchers thought various processes which are very much useful for crispification of a fuzzy number.

In case of our trapezoidal bipolar neutrosophic condition researchers have keen interest to recognize the appropriate and rational process of converting a TrBNN into a crisp number. Three several membership functions are present in case of TrBNN. At last we mentioned “Removal area method” which converts a TrBNN into a crisp number.

De-bipolarization utilizing removal area skill

Suppose, we take a linear TrBNN as follows:

$$\tilde{s}_{\text{BiTr}} = (a, b, c, d; e, f, g, h; i, j, k, l).$$

The graphical representation of a TrBNN is (Fig. 3).

Let us consider a real number $s \in R$ and a fuzzy number \tilde{P} for black line mentioned trapezium, the left part area of \tilde{P} w.r.t s is $S_l(\tilde{P}, s)$ is described as the region covered by s and the left part of the TrBNN number \tilde{P} . Now, the right side area of \tilde{P} w.r.t s is $S_r(\tilde{P}, s)$, again we consider a real number $s \in R$ along with a TrBNN \tilde{Q} for the left top most red colored trapezium and the left portion area of \tilde{Q} w.r.t s is $S_l(\tilde{Q}, s)$ is pointed as the section covered by s and the left section of the TrBNN \tilde{Q} . Again, the right side area of \tilde{Q} w.r.t s is $S_r(\tilde{Q}, s)$. Now, TrBNN of \tilde{R} for the right most blue colored trapezium, then left portion removal of \tilde{R} w.r.t s is $S_l(\tilde{R}, s)$ is pointed out as the region covered by s and the left side of the fuzzy number \tilde{R} . similarly, the right portion removal of \tilde{R} w.r.t s is $S_r(\tilde{R}, s)$.

Mean is described as:

$$S(\tilde{P}, s) = \frac{S_l(\tilde{P}, s) + S_r(\tilde{P}, s)}{2},$$

$$S(\tilde{Q}, s) = \frac{S_l(\tilde{Q}, s) + S_r(\tilde{Q}, s)}{2},$$

$$S(\tilde{R}, s) = \frac{S_l(\tilde{R}, s) + S_r(\tilde{R}, s)}{2}.$$

Hence, the de-bipolarization value of a linear TrBNN as,

$$S(\tilde{D}_{\text{TrBipo}}, l) = \frac{S(\tilde{P}, s) + S(\tilde{Q}, s) + S(\tilde{R}, s)}{3},$$

$$\text{For } s = 0, S(\tilde{P}, 0) = \frac{S_l(\tilde{P}, 0) + S_r(\tilde{P}, 0)}{2},$$

$$S(\tilde{Q}, 0) = \frac{S_l(\tilde{Q}, 0) + S_r(\tilde{Q}, 0)}{2}, S(\tilde{R}, 0) = \frac{S_l(\tilde{R}, 0) + S_r(\tilde{R}, 0)}{2}.$$

$$\text{Then, } S(\tilde{D}_{\text{TrBipo}}, 0) = \frac{S(\tilde{P}, 0) + S(\tilde{Q}, 0) + S(\tilde{R}, 0)}{3}.$$

We take $\tilde{A} = (a, b, c, d)$, $\tilde{B} = (e, f, g, h)$, $\tilde{C} = (i, j, k, l)$.

Then,

$$S_l(\tilde{Q}, 0) = \text{Area of Fig. 4} = \frac{(e+f)}{2} \cdot 2 = (e+f)$$

$$S_r(\tilde{Q}, 0) = \text{Area of Fig. 5} = \frac{(g+h)}{2} \cdot 2 = (g+h)$$

$$S_l(\tilde{R}, 0) = \text{Area of Fig. 6} = \frac{(i+j)}{2} \cdot 2 = (i+j)$$

$$S_r(\tilde{R}, 0) = \text{Area of Fig. 7} = \frac{(k+l)}{2} \cdot 2 = (k+l)$$

$$S_l(\tilde{P}, 0) = \text{Area of Fig. 8} = \frac{(a+b)}{2} \cdot 2 = (a+b)$$

$$S_r(\tilde{P}, 0) = \text{Area of Fig. 9} = \frac{(c+d)}{2} \cdot 2 = (c+d)$$

$$\text{Hence, } (\tilde{P}, 0) = \frac{(a+b+c+d)}{2}, S(\tilde{Q}, 0) = \frac{(e+f+g+h)}{2},$$

$$S(\tilde{R}, 0) = \frac{(i+j+k+l)}{2}$$

$$\text{So, } S(\tilde{D}_{\text{TrBipo}}, 0) = \frac{(a+b+c+d+e+f+g+h+i+j+k+l)}{6}$$

Cloud Service base multi-criteria group decision making problem in bipolar trapezoidal neutrosophic environment

MCGDM skill is one of the reliable, logistical and mostly used topics in this current era. Different kind of alternatives and finite number of attributes having distinct weights are associated with a decision making problem. The problem is to find out the best alternatives among all of them maintaining the alternative vs. attribute core relationship. Comparison analysis can be done in case ordering the alternatives and that will give us more realistic and prominent results. Recently, lots of researchers are invented different techniques to solve the problem but we applied this cloud service-based MCGDM problem in TrBNN environment. Finally, we compare our result with the established methods and make a ranking order using our developed de-bipolarized value. Cloud computing is a service providing accessible object of computer system reservoir, basically data accumulation and capability of computing, without vibrant controlling by the accessorise. This terminology is most frequently used to elucidate data hubs obtainable to numerous users over the internet. Nowadays large clouds occasionally are used to allocate functions over several stations from central servers. Moreover, if the connection accessed by the user is reasonably close, it can be delegated as an edge server. Clouds can be confined to a single agency, or be accessible from multiple agencies. Cloud computing depends on distribution of supply to acquire consistency and economics of scale. Reformers of public and hybrid clouds observe that cloud computing permit companies to neglect or diminish IT infrastructure expenditure. Profounder also demand that cloud computing enables enterprises to secure

their applications and move with a brisk pace, with refined manageability and meagre maintenance system, and that it provides IT experts to more swiftly synchronize resources to meet oscillating and random demands.

In this section, we consider a multi criteria decision making problem based on cloud services in which we need to select the best cloud service according to different opinions from the engineers. The developed algorithm is described briefly as follows:

Design of the MCGDM problem

Let $C = \{C_1, C_2, C_3, \dots, C_m\}$ be the set of different alternative and $R = \{R_1, R_2, R_3, \dots, R_n\}$ be the set of disjunctive attributes. Also, $\omega = \{\omega_1, \omega_2, \omega_3, \dots, \omega_n\}$ are the weights co-related with set R in which all $\omega \geq 0$ and $\sum_{i=1}^n \omega_i = 1$. Additionally, $D = \{D_1, D_2, D_3, \dots, D_K\}$ be the set of decision maker co-related with set C whose weights are pointed as $\Delta = \{\Delta_1, \Delta_2, \Delta_3, \dots, \Delta_k\}$, $\Delta_i \geq 0$ and $\sum_{i=1}^k \Delta_i = 1$. According to the knowledge, philosophical view and opinion of the decision maker the set Δ will be created.

Algorithm of the proposed MCGDM problem

Step 1: Formulation of decision matrices (D.M)

Here, all the D.M's are formulated maintaining the connection in between alternatives and attributes according to the choice of the decision makers. Also, the entire member's y_{ij} of each matrix are TrBNN. Thus, the computed matrix is described as:

$$X^K = \begin{pmatrix} & R_1 & R_2 & R_3 & \dots & R_n \\ C_1 & y_{11}^k & y_{12}^k & y_{13}^k & \dots & y_{1n}^k \\ C_2 & y_{21}^k & y_{22}^k & y_{23}^k & \dots & y_{2n}^k \\ C_3 & \cdot & \cdot & \cdot & \dots & \cdot \\ \cdot & \cdot & \cdot & \cdot & \dots & \cdot \\ C_m & y_{m1}^k & y_{m2}^k & y_{m3}^k & \dots & y_{mn}^k \end{pmatrix}. \quad (1)$$

Step 2: Formulation of normalised single D.M

To make a single group D.M namely X , we incorporated this logical procedure $y'_{ij} = \{\sum_{i=1}^k \omega_i X^i\}$ for every D.M of X^i . Thus, the concluding matrix becomes:

$$X = \begin{pmatrix} & R_1 & R_2 & R_3 & \dots & R_n \\ C_1 & y'_{11} & y'_{12} & y'_{13} & \dots & y'_{1n} \\ C_2 & y'_{21} & y'_{22} & y'_{23} & \dots & y'_{2n} \\ C_3 & \cdot & \cdot & \cdot & \dots & \cdot \\ \cdot & \cdot & \cdot & \cdot & \dots & \cdot \\ C_m & y'_{m1} & y'_{m2} & y'_{m3} & \dots & y'_{mn} \end{pmatrix}. \quad (2)$$

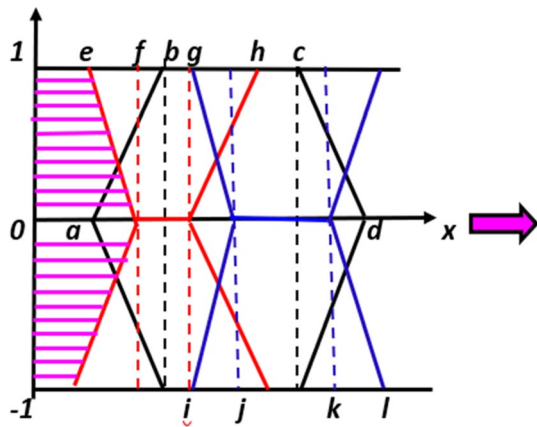


Fig. 4 Step 1

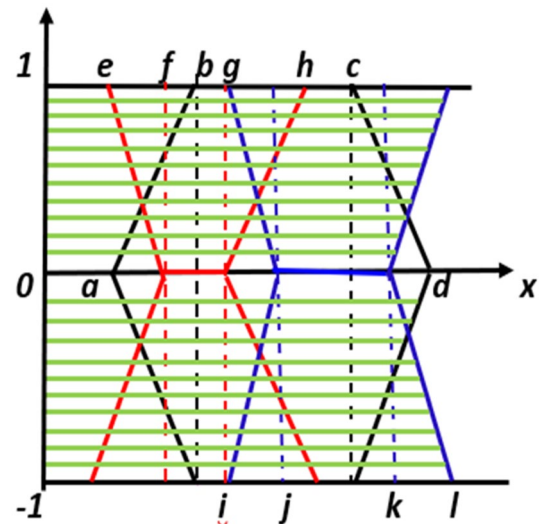


Fig. 7 Step 4

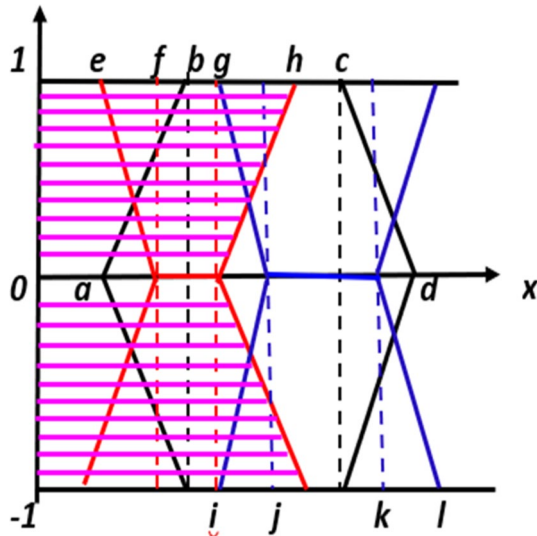


Fig. 5 Step 2

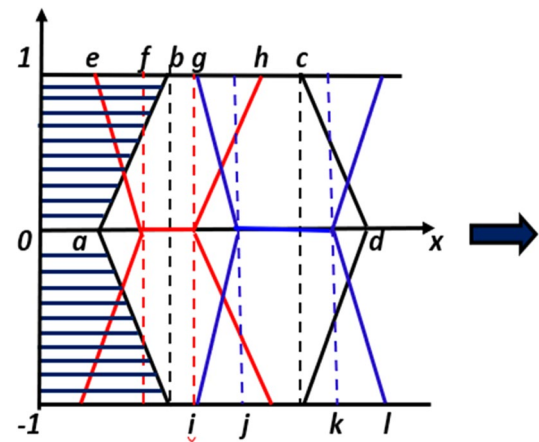


Fig. 8 Step 5

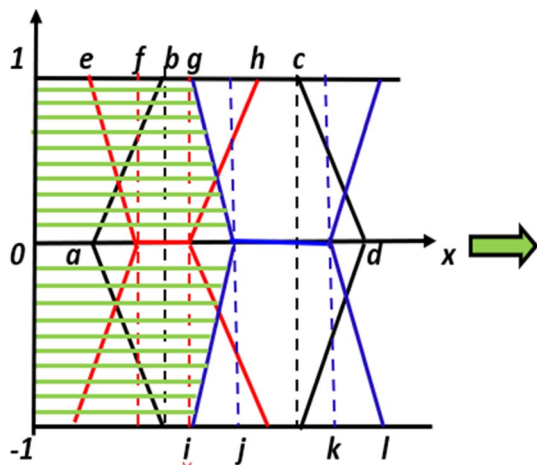


Fig. 6 Step 3

Step 3: Formulation of priority matrix

To make single D.M we incorporated the logical computation $y''_{ij} = \{\sum_{i=1}^n \Delta_i y'_{ci}, c = 1, 2, \dots, m\}$ for every column entity and finally, we find the D.M as,

$$X = \begin{pmatrix} \cdot & R_1 \\ C_1 & y''_{11} \\ C_2 & y''_{21} \\ \cdot & \cdot \\ \cdot & \cdot \\ C_m & y''_{m1} \end{pmatrix}. \quad (3)$$

Step 4: Ranking

Now, by considering the de-bipolarization skill for crispification of the matrix Eq. (3), we can calculate the best alternative of the corresponding problem. The best alternative

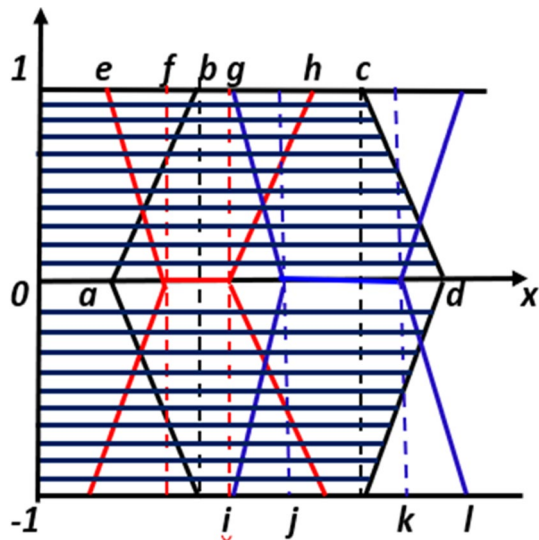


Fig. 9 Step 6

result will be the maximum value and the minimum value will be the lowest one.

Flowchart for the associated MCGDM problem

(After sensitivity circle another circle should be added as final decision) (Fig. 10).

Illustrative example

Here, we construct a cloud service-based problem in which there are three different cloud services are available. Among those cloud services facility we want to select the best cloud service in a logical way. Normally, cloud services are fully depends on the attributes accountability, reliability, service and security of the system. Keeping these points in mind different computer science engineers provides some opinions and according to their suggestions we construct the distinct decision matrices in bipolar trapezoidal environment shows below:

C_1 = Cloud Service 1,

C_2 = Cloud Service 2,

C_3 = Cloud Service 3

are the alternatives and

R_1 = Accountability,

R_2 = Reliability,

R_3 = Service and Security

are the attributes.

Let us select four distinct decision makers from our environment,

D_1 = Youth Engineer,

D_2 = Little Experienced Engineer,

D_3 = Highly Experienced Engineer

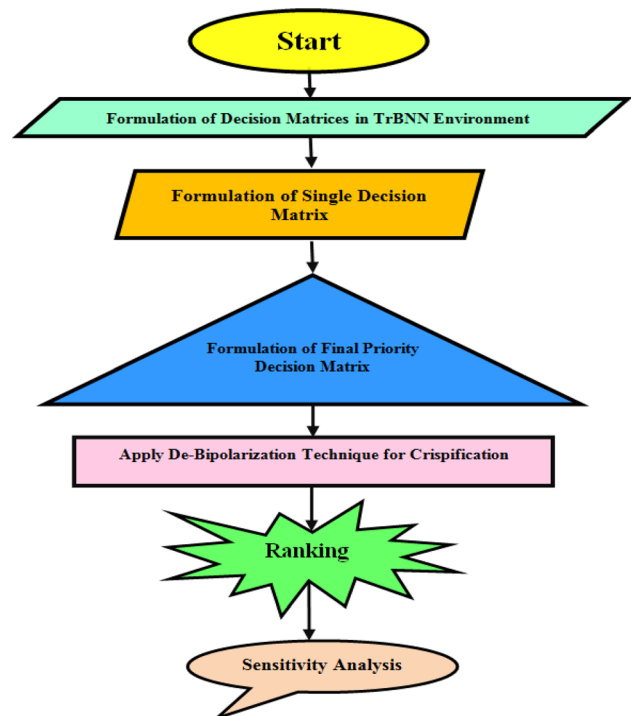


Fig. 10 Flowchart for the associated problem

of computer science background having weight distribution $D = \{0.30, 0.33, 0.37\}$ and the weight vector related to the attribute function $\Delta = \{0.35, 0.33, 0.32\}$. A verbal matrix is formulated by the engineers to support the decision maker classifying the D.M. Attribute vs. verbal phrase matrix is given below in the Tables 2 and 3.

Table 3 Verbal matrix

	R^1	R^2	R^3
C^1	L	I	VH
C^2	VL	M	H
C^3	VL	SD	VH

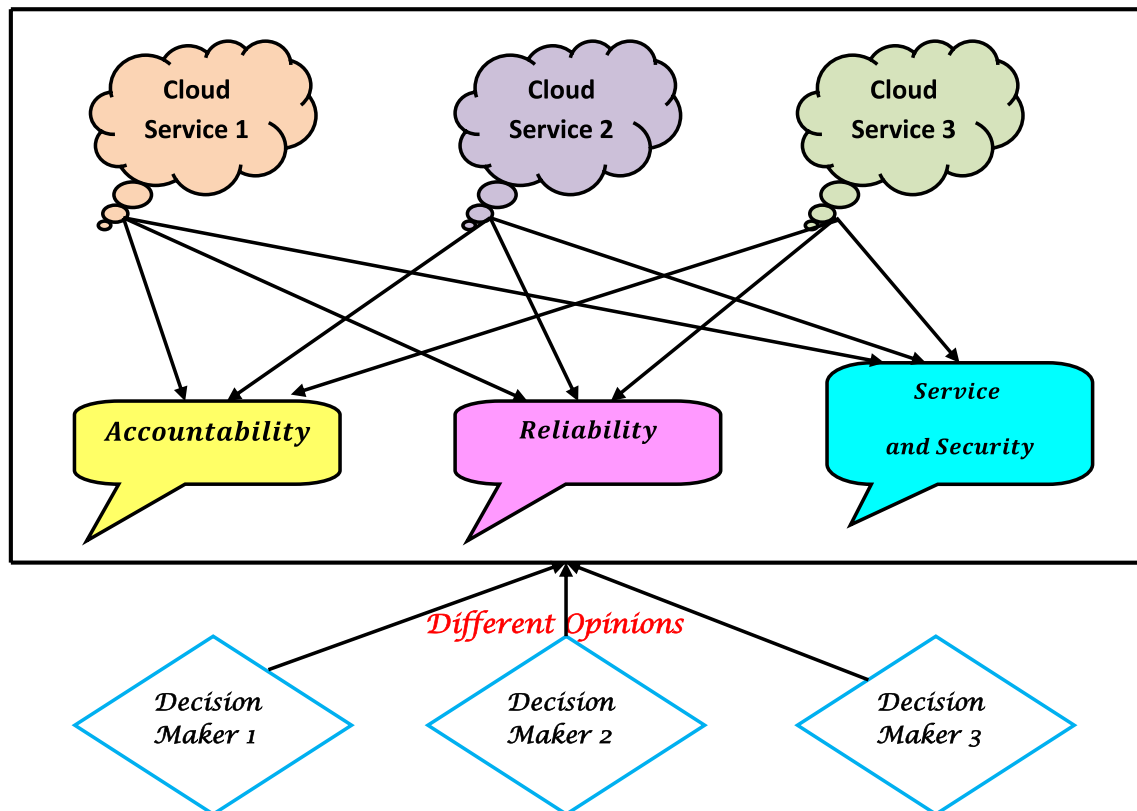


Table 2 List of verbal phrase

Sl. no	Attribute	Verbal phrase
Quantitative attributes		
1	Accountability	Very high (VH), High (L), Intermediate (I), Small (S), Very small (VS)
2	Reliability	Very high (VH), High (H), Mid (M), Low (L), Very low (VL)
3	Service and Security	Very high (VH), High (H), Standard (SD), Low (L), Very low (VL)

Step 1: According to the D.M's opinion the decision matrices are shown like this:

Thus, the computed ranking order is $7.15 < 7.91 < 8.53$. So, ordering of the cloud service is pointed out as

$$D^1 = \begin{pmatrix} . & R_1 & R_2 & R_3 \\ C_1 < 1, 2, 3, 4; 0.5, 1.2, 2.5, 3; 1.3, 2.3, 3.5, 4.5 > < 1, 4, 6, 9; 0.5, 3, 6, 8; 3.5, 6, 7.5, 10 > < 1, 5, 7, 9; 0.6, 2, 4, 6; 2, 4.5, 6.5, 9.5 > \\ C_2 < 0.7, 2, 3, 4; 0.5, 1, 2.5, 3; 1.5, 3, 4.5, 5.5 > < 2, 4, 6, 8; 1.5, 2.3, 3.5, 5; 3, 5, 7, 9 > < 1.5, 2.5, 3.5, 4.5; 1, 2, 3, 4; 2, 3, 4, 6 > \\ C_3 < 1, 4, 7, 9; 1, 2, 3, 5; 3, 5, 7, 9 > < 1.5, 2.5, 3.5, 4.5; 1, 2, 3, 4; 2, 3, 4, 6 > < 1, 2, 4, 6; 0.5, 1, 2, 3, 4; 3, 4, 5, 7 > \end{pmatrix}$$

Youth Engineer's opinion.

$$C_2 > C_3 > C_1.$$

$$D^2 = \begin{pmatrix} . & R_1 & R_2 & R_3 \\ C_1 < 1, 3, 5, 7; 0.5, 1.5, 2.5, 3.5; 2, 4, 6, 8 > < 2, 4, 5, 6; 1.5, 2.5, 3.5, 5.5; 4, 5, 7, 8 > < 1, 2, 3, 4; 0.5, 1, 2.5, 3; 0.8, 1.5, 2.5, 5 > \\ C_2 < 2.5, 4.5, 6.5, 8.5; 1, 3, 5, 7; 5, 6, 7, 9 > < 1.5, 2.5, 3.5, 5; 1, 2, 3, 5; 2.5, 3.5, 6, 7 > < 1, 4, 7, 9; 0.5, 2, 3, 5; 3.9, 5.5, 7.5, 9 > \\ C_3 < 1.5, 2, 3, 4.5; 1, 2, 3, 4; 2.5, 3, 5, 7 > < 1, 4, 7, 9; 0.5, 1.5, 3, 5; 3.5, 5.5, 7.5, 9.5 > < 1, 5, 9, 13; 0.6, 2, 6, 8; 2, 6, 9.5, 11 > \end{pmatrix}$$

Little Experienced Engineer's Opinion.

$$D^3 = \begin{pmatrix} . & R_1 & R_2 & R_3 \\ C_1 < 2, 4, 6, 8; 1.5, 3.5, 5.5, 7.5; 4, 6, 8, 10 > < 1.5, 3.5, 5, 7; 1, 3, 5, 6; 2.5, 4, 6, 8 > < 1, 2, 3, 4; 0.5, 1, 2, 3.5; 1.2, 3, 4, 5.5 > \\ C_2 < 1, 2, 3, 4; 0.5, 1.5, 2.5, 3.5; 1.3, 2.3, 3.3, 5 > < 1, 3, 5, 7; 1.5, 3, 5, 8; 3.5, 5, 7, 8.5 > < 1, 4, 7, 9; 0.4, 2, 4, 6; 2, 5, 7.5, 9.5 > \\ C_3 < 0.5, 1, 2, 3.5; 0.3, 1, 1.5, 2.5; 1.5, 3, 4, 5 > < 0.3, 2, 4.3, 6; 1, 2, 3, 4; 1.2, 3.4, 5, 7 > < 1, 3, 5, 7; 0.6, 2.6, 3.6, 6; 2.5, 5, 6, 8 > \end{pmatrix}$$

Highly Experienced Engineer's Opinion.

Step 2: Formulation of weighted decision matrix

$$M = \begin{pmatrix} . & R_1 & R_2 & R_3 \\ C_1 < 1.37, 3.07, 4.77, 6.47; 0.87, 2.15, 3.61, 4.83; 2.53, 4.23, 5.99, 7.69 > < 1.52, 3.81, 5.30, 7.27; 1.01, 2.83, 4.80, 6.43; 3.29, 4.93, 6.78, 8.60 > < 1.00, 2.90, 4.20, 5.50; 0.53, 1.30, 2.76, 4.08; 1.30, 2.95, 4.25, 6.53 > \\ C_2 < 1.34, 2.82, 4.15, 5.48; 0.66, 1.84, 3.32, 4.50; 2.58, 3.73, 4.88, 6.47 > < 1.46, 3.13, 4.80, 6.64; 1.33, 2.46, 3.89, 6.11; 3.02, 4.50, 6.67, 8.15 > < 1.15, 3.55, 5.95, 7.65; 0.61, 2.00, 3.37, 5.07; 2.62, 4.56, 6.45, 8.28 > \\ C_3 < 0.98, 2.23, 3.83, 5.48; 0.74, 1.63, 2.44, 3.74; 2.28, 3.60, 5.23, 6.86 > < 0.89, 2.81, 4.95, 6.54; 0.83, 1.83, 3.00, 4.33; 2.19, 3.97, 5.52, 7.52 > < 1.00, 3.36, 6.02, 8.68; 0.57, 1.92, 4.21, 6.06; 2.48, 5.03, 6.85, 8.69 > \end{pmatrix}$$

Step 3: Formulation of priority matrix

$$M = \begin{pmatrix} < 1.25, 2.72, 4.26, 5.82; 0.76, 1.88, 3.14, 4.37; 2.46, 3.86, 5.38, 7.02 > \\ < 1.29, 3.26, 5.02, 6.82; 1.06, 2.39, 3.92, 5.65; 2.85, 4.48, 6.34, 8.10 > \\ < 1.04, 3.26, 5.35, 7.22; 0.57, 1.73, 3.42, 5.04; 2.11, 4.15, 5.81, 7.80 > \end{pmatrix}$$

Step 4: Ranking

Now, the de-bipolarization technique for the crispification of TrBNN has been performed here to get the final ideal D.M as,

$$M = \begin{pmatrix} < 7.15 > \\ < 8.53 > \\ < 7.91 > \end{pmatrix}$$

Sensitivity analysis (SA)

In general, sensitivity analysis of a MCGDM problem shows ranking order of the alternatives in different situations. A sensitivity analysis is performed to recognize how weights of the attribute of every criterion changing the computed matrix and their ordering. The fundamental idea of SA is to swap weights of the attributes keeping the others term are fixed. The lower table is the assessment table which illustrate the SA results in distinct cases (Figs. 11, 12).

Attribute weight	Final decision matrix	Ordering
$< (0.35, 0.33, 0.32) >$	$\begin{pmatrix} < 7.15 > \\ < 8.53 > \\ < 7.91 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$< (0.33, 0.33, 0.34) >$	$\begin{pmatrix} < 7.12 > \\ < 8.49 > \\ < 7.97 > \end{pmatrix}$	$C_2 > C_3 > C_1$

Attribute weight	Final decision matrix	Ordering
$<(0.4, 0.33, 0.27)>$	$\begin{pmatrix} < 7.22 > \\ < 8.64 > \\ < 7.77 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.3, 0.4, 0.3)>$	$\begin{pmatrix} < 7.12 > \\ < 8.53 > \\ < 8.02 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.3, 0.3, 0.4)>$	$\begin{pmatrix} < 7.07 > \\ < 8.[34] > \\ < 8.08 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.35, 0.3, 0.35)>$	$\begin{pmatrix} < 7.14 > \\ < 8.50 > \\ < 7.94 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.33, 0.35, 0.32) >$	$\begin{pmatrix} < 7.14 > \\ < 8.53 > \\ < 7.97 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.25, 0.4, 0.35) >$	$\begin{pmatrix} < 7.05 > \\ < 8.43 > \\ < 8.12 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.35, 0.25, 0.4) >$	$\begin{pmatrix} < 7.12 > \\ < 8.44 > \\ < 7.97 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.3, 0.35, 0.35) >$	$\begin{pmatrix} < 7.10 > \\ < 8.46 > \\ < 8.06 > \end{pmatrix}$	$C_2 > C_3 > C_1$
$<(0.35, 0.35, 0.3) >$	$\begin{pmatrix} < 7.17 > \\ < 8.57 > \\ < 7.91 > \end{pmatrix}$	$C_2 > C_3 > C_1$

Remarks: From the above sensitivity analysis table, it can be observed that for different values of attribute functions,

ultimately C_2 becomes the best cloud service provider in all cases although rest of the others changed their positions according to different conditions. The above two graphs are represents the sensitivity analysis results in dissimilar cases.

Comparison table

In this section, we compared this proposed work with the established works proposed by the researchers [32, 36, 41, 42, 46, 60] to find the best cloud service among those three and it is noticed that in each cases C_2 becomes the best cloud service provider. The comparison table is shown as below:

Established methods	Ranking
Deli [36]	$C_2 > C_3 > C_1$
Aslam [32]	$C_2 > C_3 > C_1$
Ulucay [41]	$C_2 > C_3 > C_1$
Wang [42]	$C_2 > C_3 > C_1$
Jana [46]	$C_2 > C_1 > C_3$
Garg [60]	$C_2 > C_1 > C_3$
Our proposed method	$C_2 > C_3 > C_1$

Conclusion and future research scope

In this current epoch, the theory of bipolarity and its extension are widely applied in the field of mathematical modeling and engineering oriented technical problems. In this article, the conception of trapezoidal bipolar neutrosophic set is pragmatic, fascinating and has an important practical application

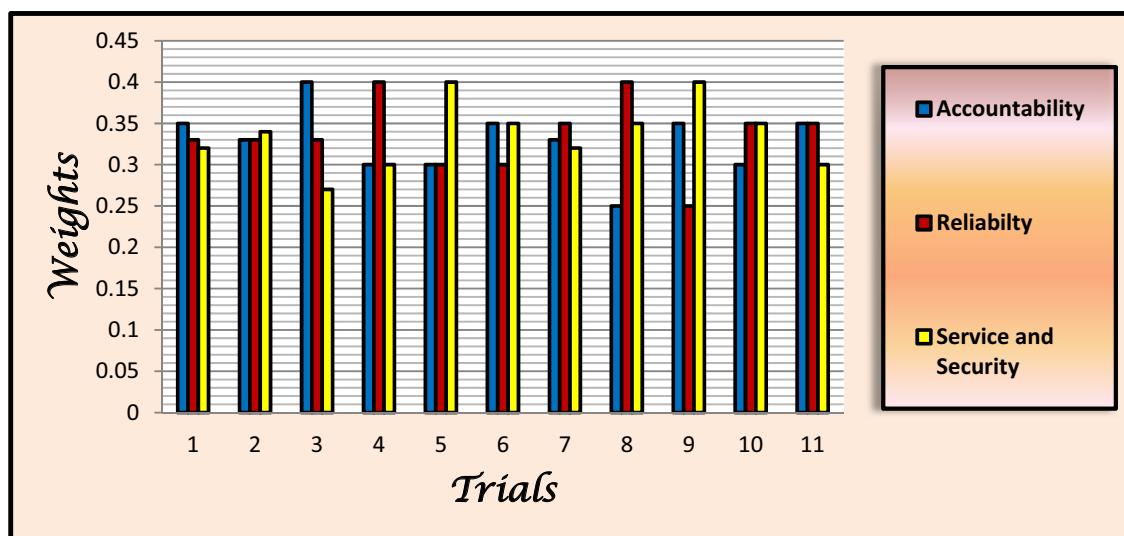


Fig. 11 Sensitivity analysis table on attribute function

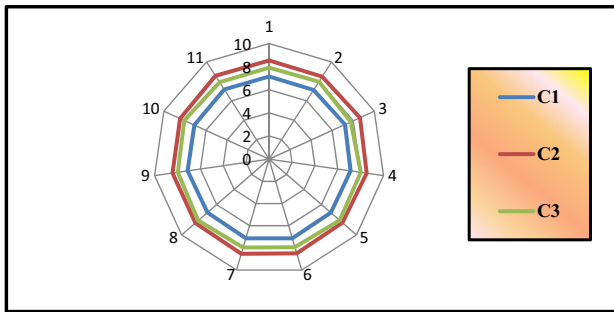


Fig. 12 Best alternative cloud service table

in present-day research domain. Moreover, we formulated the concept of both linear and non-linear TrBNN along with generalized TrBNN and its graphical significance in neutrosophic arena. The construction of disjunctive categories of TrBNN according to membership component's dependency and non-dependency plays a fundamental impact in real life. Furthermore, establishment of de-bipolarization skill utilizing removal area technique gave an additional weight in Crispification method. Also, we consider a cloud computing-based MCGDM problem associated with different decision makers from disjunctive domain in TrBNN environment. To resolve this MCGDM problem we utilized different operators of TrBNN and applied the established de-bipolarization skill for ordering of the alternatives. Additionally, a sensitivity analysis is performed in MCGDM problem considering different kinds of weight in place of attribute functions. Lastly, we performed a comparison analysis with several established methods and generate the comparison table which indicates the different ranking order in distinct cases.

In future, researchers can apply this valuable conception of TrBNN in disjunctive fields like pattern recognition problem, image-processing, big-data analysis, circuit theory problem, medical diagnoses problem and other mathematical modeling etc. Also, the crispification value can be applied in various realistic problems. Additionally, several new mathematical models can be formulated using the help of TrBNN classification and its non-linear cases. This remarkable concept will help researchers to counter a plethora of realistic problems in TrBNN arena.

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

References

1. Zadeh LA (1965) Fuzzy sets. *Inf Control* 8(3):338–353
2. Abbasbandy S, Hajjari T (2009) A new approach for ranking of trapezoidal fuzzy numbers. *Comput Math Appl* 57(3):413–419
3. Chakraborty A, Mondal SP, Alam S, Ahmadian A, Senu N, De D, Salahshour S (2019) The pentagonal fuzzy number: its different representations, properties, ranking, defuzzification and application in game problems. *Symmetry* 11(2):248
4. Chakraborty A, Maity S, Jain S, Monda SP, Alam S (2020) Hexagonal fuzzy number and its distinctive representation, ranking, defuzzification technique and application in production inventory management problem. *Granul Comput* 1–15
5. Atanassov K (1986) Intuitionistic fuzzy sets. *Fuzzy Sets Syst* 20:87–96
6. Liu F, Yuan XH (2007) Fuzzy number intuitionistic fuzzy set. *Fuzzy Syst Math* 21(1):88–91
7. Ye J (2014) Prioritized aggregation operators of trapezoidal intuitionistic fuzzy sets and their application to multicriteria decision-making. *Neural Comput Appl* 25(6):1447–1454
8. Smarandache F (1999) A unifying field in logics. In: *Neutrosophy: neutrosophic probability, set and logic*, pp 1–141
9. Wang H, Smarandache F, Zhang Y, Sunderraman R (2010) Single valued neutrosophic sets. *Infinite study*
10. Abdel-Basset M, Mohamed M, Hussien AN, Sangaiah AK (2018) A novel group decision-making model based on triangular neutrosophic numbers. *Soft Comput* 22(20):6629–6643
11. Ye J (2015) Trapezoidal neutrosophic set and its application to multiple attribute decision-making. *Neural Comput Appl* 26(5):1157–1166
12. Chakraborty A, Broumi S, Singh PK (2019) Some properties of pentagonal neutrosophic numbers and its applications in transportation problem environment. *Neutrosophic Sets Syst* 28(1):16
13. Abdel-Basset M, Saleh M, Gamal A, Smarandache F (2019) An approach of TOPSIS technique for developing supplier selection with group decision making under type-2 neutrosophic number. *Appl Soft Comput* 77:438–452
14. Peng JJ, Wang JQ, Wu XH, Wang J, Chen XH (2015) Multi-valued neutrosophic sets and power aggregation operators with their applications in multi-criteria group decision-making problems. *Int J Comput Intell Syst* 8(2):345–363
15. Maity S, Chakraborty A, De SK, Mondal SP, Alam S (2020) A comprehensive study of a backlogging EOQ model with non-linear heptagonal dense fuzzy environment. *RAIRO Oper Res* 54(1):267–286
16. Garg H (2018) A linear programming method based on an improved score function for interval-valued pythagorean fuzzy numbers and its application to decision-making. *Int J Uncertain Fuzziness Knowl Based Syst* 26(01):67–80
17. Wang JQ, Peng JJ, Zhang HY, Liu T, Chen XH (2015) An uncertain linguistic multi-criteria group decision-making method based on a cloud model. *Group Decis Negot* 24(1):171–192
18. Jiang T, Li Y (1996) Generalized defuzzification strategies and their parameter learning procedures. *IEEE Trans Fuzzy Syst* 4(1):64–71
19. Nabeeh NA, Abdel-Basset M, El-Ghareeb HA, Aboelfetouh A (2019) Neutrosophic multi-criteria decision making approach for iot-based enterprises. *IEEE Access* 7:59559–59574
20. Biswas P, Pramanik S, Giri BC (2016) TOPSIS method for multi-attribute group decision-making under single-valued neutrosophic environment. *Neural Comput Appl* 27(3):727–737
21. Huang YH, Wei GW, Wei C (2017) VIKOR method for interval neutrosophic multiple attribute group decision-making. *Information* 8(4):144

22. Stanujkic D, Zavadskas EK, Smarandache F, Brauers WK, Karabasevic D (2017) A neutrosophic extension of the MULTI-MOORA method. *Informatica* 28(1):181–192
23. Haque TS, Chakraborty A, Mondal SP, Alam S (2020) Approach to solve multi-criteria group decision-making problems by exponential operational law in generalised spherical fuzzy environment. *CAAI Trans Intell Technol* 5(2):106–114
24. Pal S, Chakraborty A (2020) Triangular neutrosophic-based EOQ model for non- instantaneous deteriorating item under shortages. *Am J Bus Oper Res* 1(1):28–35
25. Deli I, Ali M, Smarandache F (2015) Bipolar neutrosophic sets and their application based on multi-criteria decision making problems. In: 2015 International conference on advanced mechatronic systems (ICAMEchS), pp 249–254
26. Broumi S, Smarandache F, Talea M, Bakali A (2016) An introduction to bipolar single valued neutrosophic graph theory. *Appl Mech Mater* 8:184–191
27. Chakraborty A, Mondal SP, Mahata A, Alam S (2020) Cylindrical neutrosophic single-valued number and its application in network problem, multi criterion decision making problem and graph theory. *CAAI Trans Intell Technol* 5(2):68–77
28. Chakraborty A (2020) Minimal spanning tree in cylindrical single-valued neutrosophic arena, neutrosophic graph theory and algorithm, Chap 9. IGI Global, pp 260–278. ISBN13:9781799813132
29. Lee KJ (2009) Bipolar fuzzy subalgebras and bipolar fuzzy ideals of BCK/BCI-algebras. *Bull Malays Math Sci Soc* 32(3):361–373
30. Bosc P, Pivert O (2013) On a fuzzy bipolar relational algebra. *Inf Sci* 219:1–16
31. Molodtsov D (1999) Soft set theory—first results. *Comput Math Appl* 37(4–5):19–31
32. Abdullah S, Aslam M, Ullah K (2014) Bipolar fuzzy soft sets and its applications in decision making problem. *J Intell Fuzzy Syst* 27(2):729–742
33. Kang MK, Kang JG (2012) Bipolar fuzzy set theory applied to sub-semigroups with operators in semigroups. *Pure Appl Math* 19(1):23–35
34. Ali M, Smarandache F (2017) Complex neutrosophic set. *Neural Comput Appl* 28(7):1817–1834
35. Uluçay V, Deli I, Şahin M (2018) Similarity measures of bipolar neutrosophic sets and their application to multiple criteria decision making. *Neural Comput Appl* 29(3):739–748
36. Wang L, Zhang HY, Wang JQ (2018) Frank Choquet Bonferroni mean operators of bipolar neutrosophic sets and their application to multi-criteria decision-making problems. *Int J Fuzzy Syst* 20(1):13–28
37. Chakraborty A, Mondal SP, Alam S, Ahmadian A, Senu N, De D, Salahshour S (2019) Disjunctive representation of triangular bipolar neutrosophic numbers, de-bipolarization technique and application in multi-criteria decision-making problems. *Symmetry* 11(7):932
38. Hashim RM, Gulistan M, Smarandache F (2018) Applications of neutrosophic bipolar fuzzy sets in HOPE foundation for planning to build a children hospital with different types of similarity measures. *Symmetry* 10(8):331
39. Lee KM (2000) Bipolar-valued fuzzy sets and their operations. In: *Proc. int. conf. on intelligent technologies*, Bangkok, Thailand, 2000, pp 307–312
40. Jana C, Pal M, Wang JQ (2020) Bipolar fuzzy Dombi prioritized aggregation operators in multiple attribute decision making. *Soft Comput* 24(5):3631–3646
41. Broumi S, Bakali A, Talea M, Smarandache F, Ali M (2017) Shortest path problem under bipolar neutrosophic setting. *Appl Mech Mater* 859:59–66
42. Tao F, Zhang L, Liu Y, Cheng Y, Wang L, Xu X (2015) Manufacturing service management in cloud manufacturing: overview and future research directions. *J Manuf Sci Eng* 137(4):pp:1–11
43. Ding S, Xia CY, Zhou KL, Yang SL, Shang JS (2014) Decision support for personalized cloud service selection through multi-attribute trust worthiness evaluation. *PLoS ONE* 9(9):1–15
44. ur Rehman, Z, Hussain FK, Hussain OK (2011) Towards multi-criteria cloud service selection. In: 2011 Fifth international conference on innovative mobile and internet services in ubiquitous computing, pp 44–48
45. Garg SK, Versteeg S, Buyya R (2013) A framework for ranking of cloud computing services. *Future Gener Comput Syst* 29(4):1012–1023
46. Yang J, Lin W, Dou W (2013) An adaptive service selection method for cross-cloud service composition. *Concurr Comput Pract Exp* 25(18):2435–2454
47. Jaiganesh M, Kumar A, Vincent A (2013) B3: fuzzy-based data center load optimization in cloud computing. *Math Probl Eng*
48. Wei GW (2011) Gray relational analysis method for intuitionistic fuzzy multiple attribute decision making. *Expert Syst Appl* 38(9):11671–11677
49. Ashtiani B, Haghighirad F, Makui A, Ali Montazer G (2009) Extension of fuzzy TOPSIS method based on interval-valued fuzzy sets. *Appl Soft Comput* 9(2):457–461
50. Chen CT, Lin KH (2010) A decision-making method based on interval-valued fuzzy sets for cloud service evaluation. In: 4th International conference on new trends in information science and service science, pp 559–564
51. Su CH, Tzeng GH, Tseng HL (2012) Improving cloud computing service in fuzzy environment—combining fuzzy DANP and fuzzy VIKOR with a new hybrid FMCDM model. In: 2012 International conference on fuzzy theory and its applications (iFUZZY2012), pp 30–35
52. Chen C-T, Hung W-Z, Zhang W-Y (2013) Using interval-valued fuzzy VIKOR for cloud service provider evaluation and selection. In: *Proceedings of the international conference on business and information (BAI '13)*, Bali, Indonesia, July 2013
53. Garg H (2016) A novel accuracy function under interval-valued Pythagorean fuzzy environment for solving multicriteria decision making problem. *J Intell Fuzzy Syst* 31(1):529–534
54. Dey A, Pradhan R, Pal A, Pal T (2018) A genetic algorithm for solving fuzzy shortest path problems with interval type-2 fuzzy arc lengths. *Malays J Comput Sci* 31(4):255–270
55. Zhao H, Lingfei Xu et al (2019) A new and fast waterflooding optimization workflow based on INSIM-derived injection efficiency with a field application. *J Pet Sci Eng* 179:1186–1200
56. Sheng GL, Su YL, Wang WD (2019) A new fractal approach for describing induced-fracture porosity/permeability/compressibility in stimulated unconventional reservoirs. *J Pet Sci Eng* 179:855–866

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.